




| N38z MINI EXCAVATOR

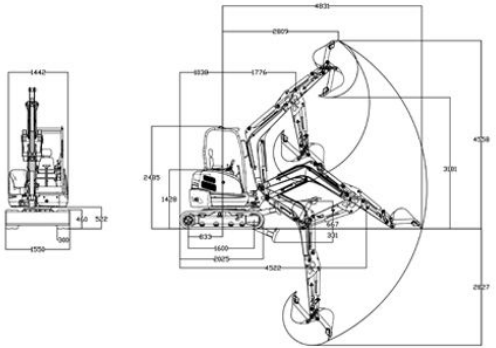

- ◆ All imported parts, the whole machine performance is more stable;
- ◆ Walking full hydraulic pilot control, feet control sensitive;
- ◆ Using load sensitive variable plunger piston pump, smooth control, flexible action;
- ◆ Increase the driving space, get on and off the bus without obstruction;
- ◆ Disc flow cyclowire motor, shuttle valve with hydraulic brake pads, secondary planetary gear reducer.

①



Engines:
Using Kubota engine, low noise,
low vibration of environmental
protection design

②



Operation table
A new upgrade of
operation convenience

③



Stop valve
Can be equipped with auxiliary
tools, to prevent oil leakage

④



Thickens the chassis
The load-bearing
capacity is stronger

| Product parameters

Total Weight	3800kg
Total length	4522mm
Total width	1550mm
Total height	2485mm
Maximum digging radius	4830mm
Maximum excavation depth	2830mm
Maximum excavation height	4560mm

Maximum unloading height	3180mm
Minimum ground clearance	290mm
Engine brand	Kubota
Engine model	V1505
Output Power	18.2kw
Walking speed	0-3.3km/h
Climbing angle	30%