

Concrete pump


BSA 1409 D

Output up to 94 m³/h

Delivery pressure up to 106 bar



Performance diagram

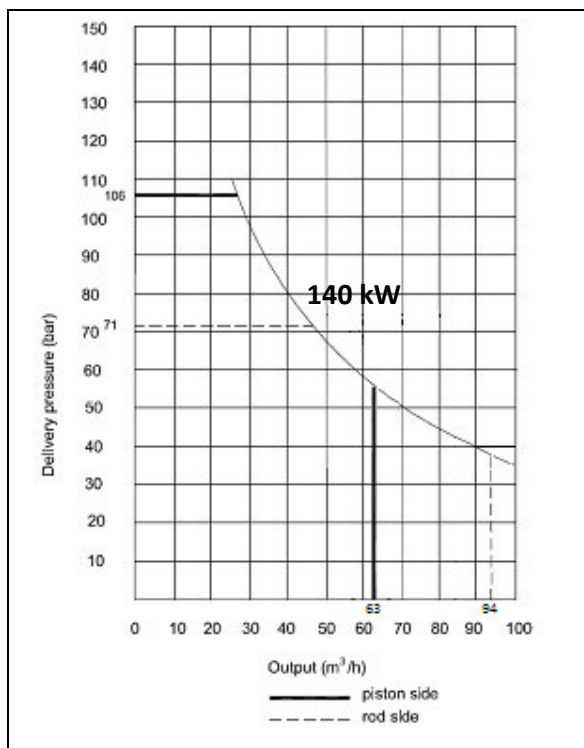


Technical data for concrete pump


Model		BSA 1409 D
Output	m ³ /h	94 / 63*
Delivery pressure	bar	71/106*
Delivery cylinder	∅ mm	200
Delivery cyl. stroke	mm	1400
Strokes / minute		35 / 24*
Engine power	KW	140
Hopper Capacity	L	RS 905A aprox. 600
Filling height	m	1.3
Transfer tube		S 2015 D
Pressure Connection	"	5.5
Control system		EPS FFH

*Values for hydraulic fluid being fed to piston side.


All data maximum theoretical

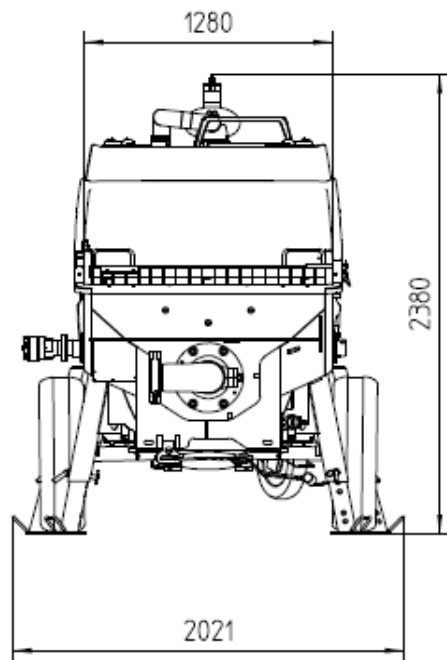

Weight = 4.6 T

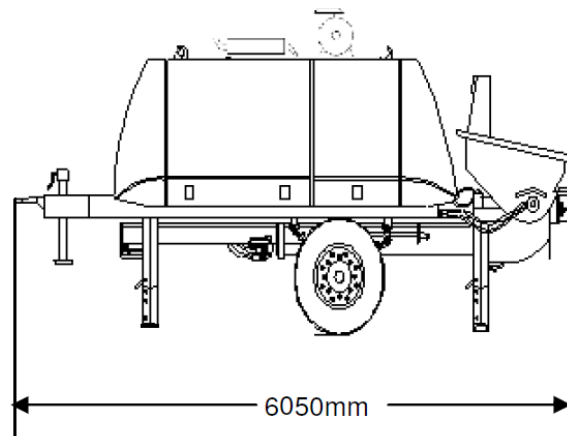

Hopper with S-valve

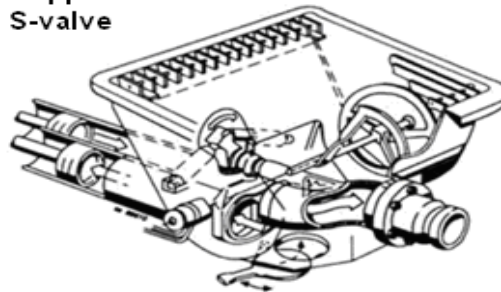

Scope of delivery

Standard

- Drive diesel engine, 140 kW.
- Hopper with agitator
- Operating manuals and spare part lists 2x
- Trailer F 8, travelling on site
- Centralized grease lubrication with hand pump
- Grille 70 mm
- Splash guard
- Mechanical jack
- Tow bar
- Cast wear parts, highly wear resistant
- Square outriggers 4x mech.15°-slanting
- SBU
- RSA – Grill safety
- Reducer kit , consisting of:
 - reducer 6" – 5.5"

Optional/Extras

- Flushing water pump, 22 bar, easy for operation
- Connection kit for connecting alternative pipelines, consisting of:
 - PM weld on ring 5.5 "
 - PM clamp coupling 5.5"
 - PM seal 5.5"

Putzmeister Concrete Machines Pvt. Ltd. Plot No. N4, Phase IV, Verna Industrial Estate, Verna Salcete, Goa-403 722, India

Tel- +91 832 669 6000, Fax - +91832 669 6300, Website – www.pmw.co.in

For all your support needs, contact - **Sales – sales@pmw.co.in Service – aps@pmw.co.in**