


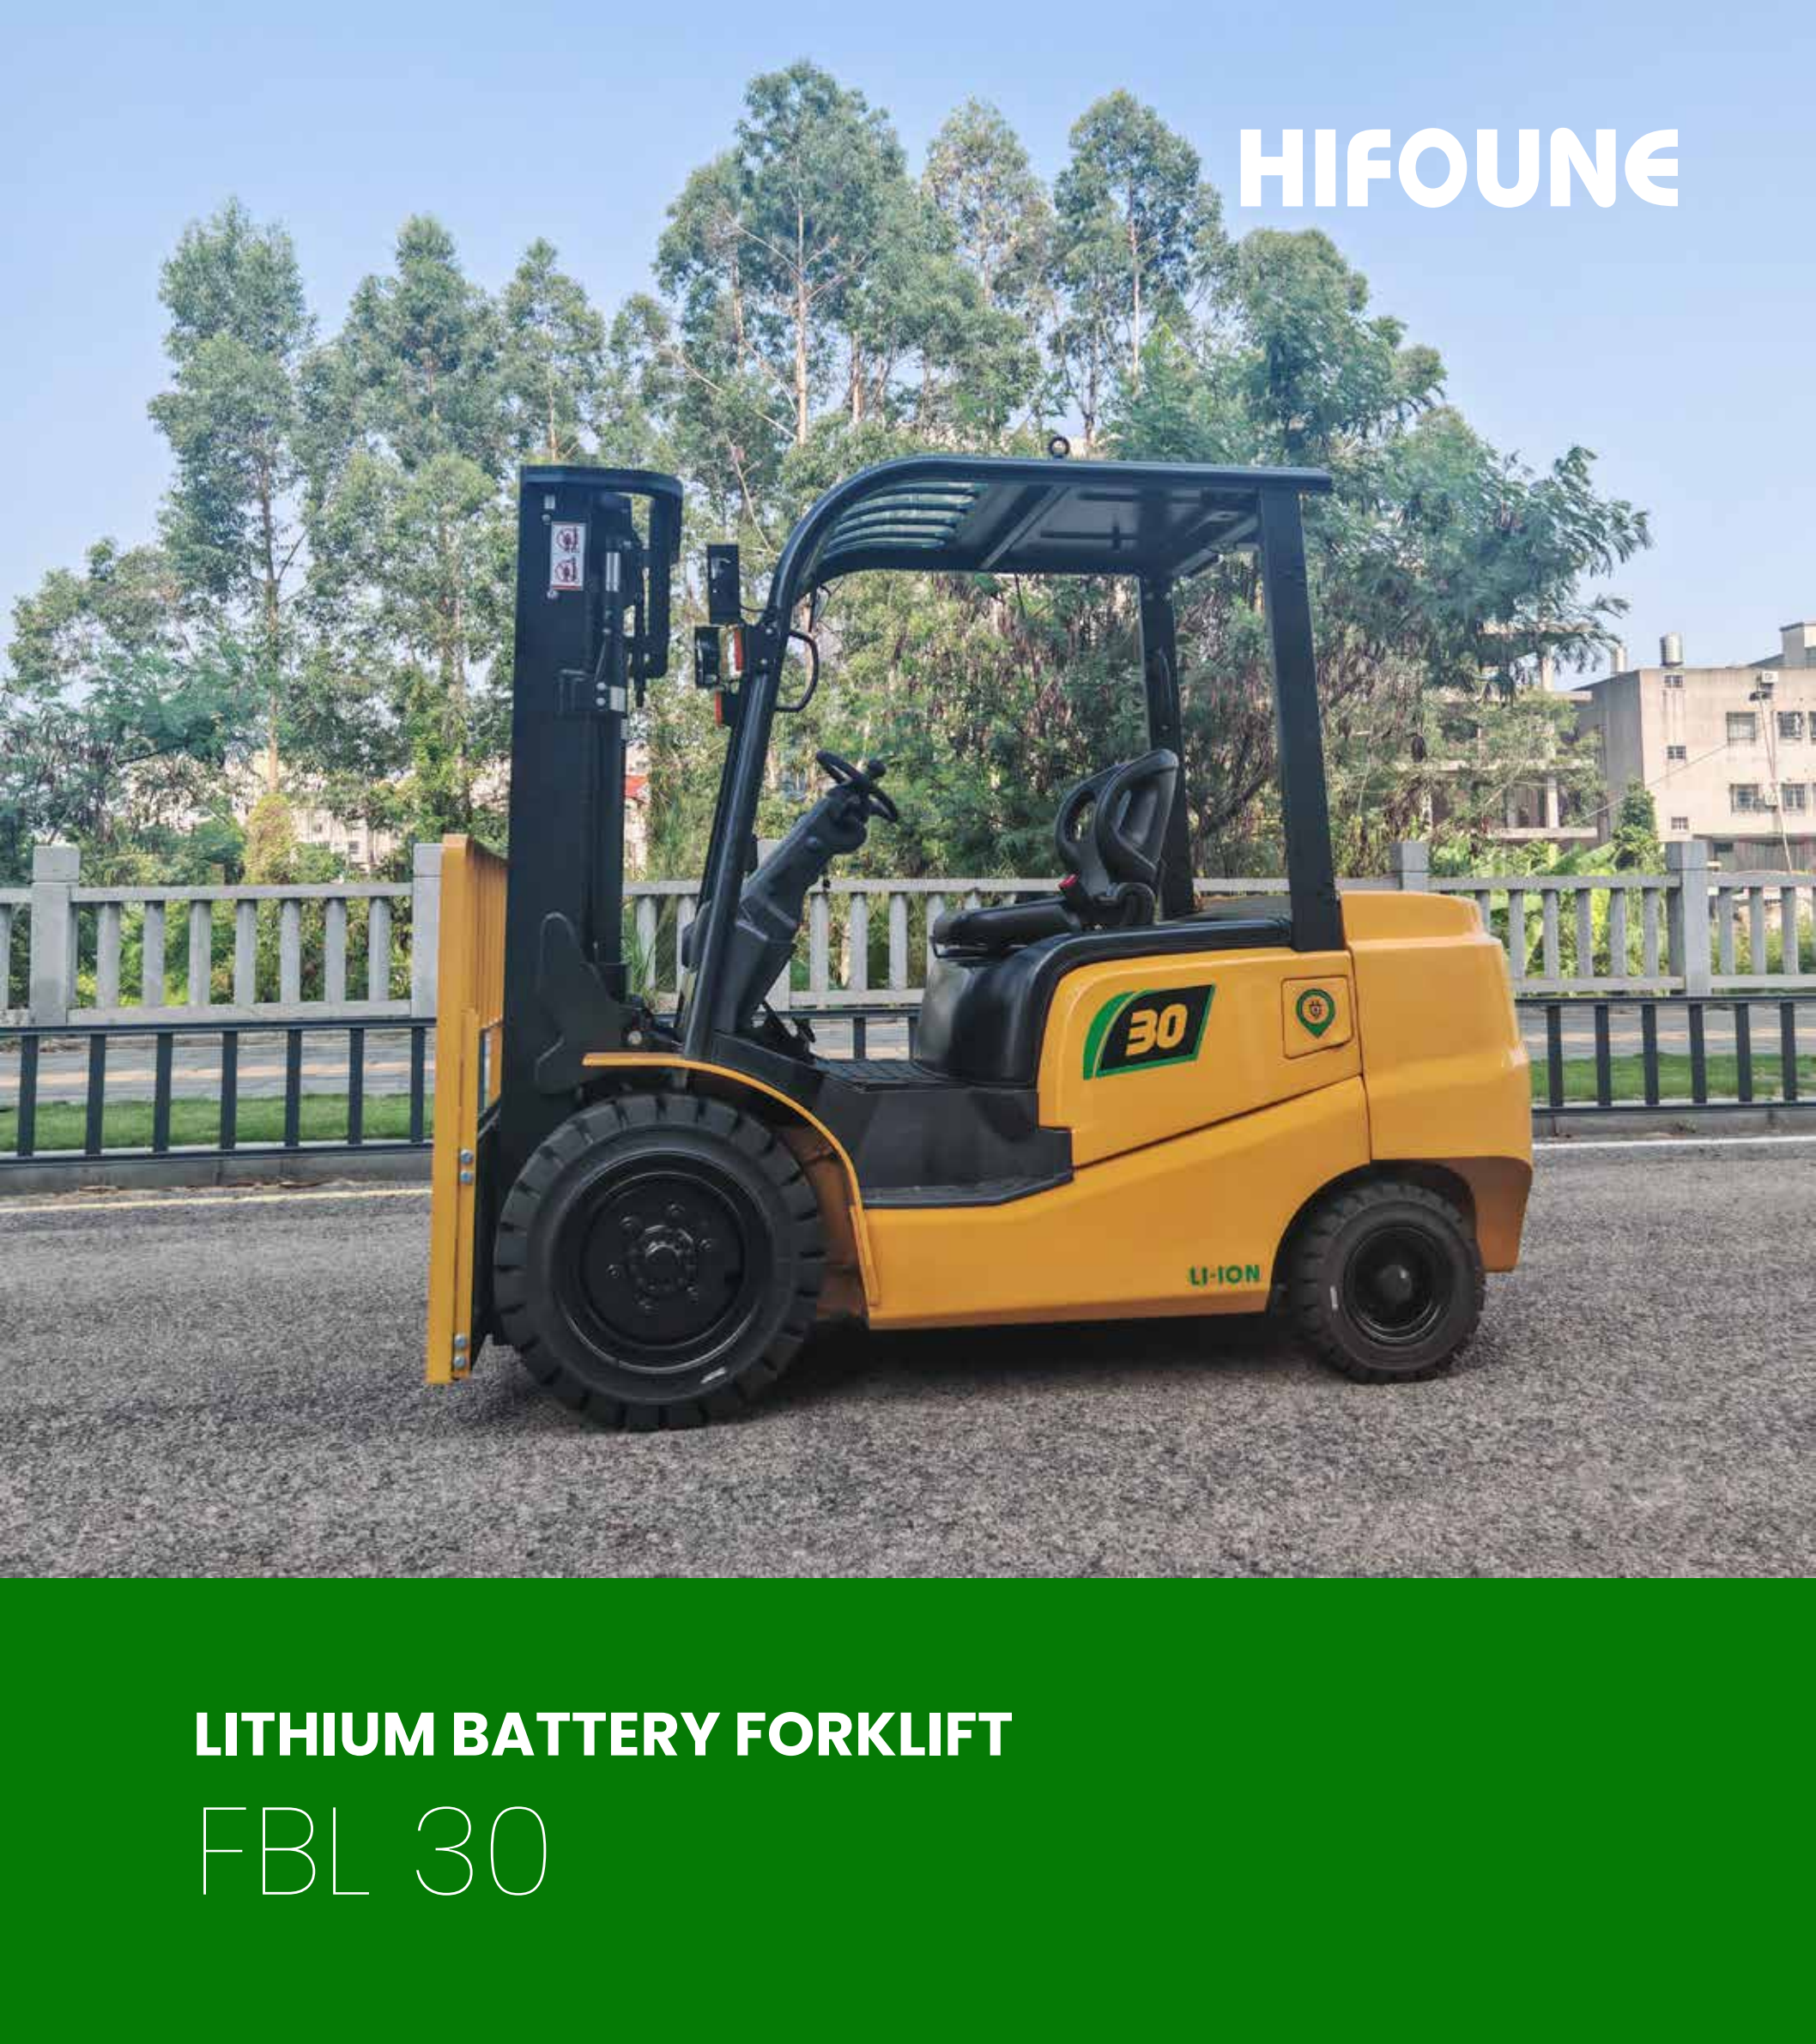

HIFOUNE

LITHIUM BATTERY FORKLIFT
FBL 30

Specification

Model		FBL30
Character	-	Power Mode
	-	Lithium Iron Phosphate Battery
	-	Driving Mode
	-	Seat
Weight	Kg	Load Capacity
	mm	3000
	mm	Load Center
	mm	500
Size	mm	Max. Lifting Height
	Kg	3000
	Kg	Self-Weight
	Kg	4100
Tires	mm	Battery Weight
	mm	180
	mm	Front Overhang
	mm	475
Performance	mm	Wheelbase
	Deg	1650
	mm	Mast Tilting Angle (Fwd/Bwd)
	mm	6/12
System	mm	Mast Height (Fork Lowered)
	mm	2140
	mm	Free Lifting Height
	mm	145
Tires	mm	Max. Lifting Height
	mm	4135
	mm	Overhead Guard Height
	mm	2150
Performance	mm	Driver's Seat Height
	mm	1110
	mm	Overall Length (Without Fork)
	mm	2540
System	mm	Overall Width
	mm	1220
	mm	Fork Size: Thickness*Width*Length
	mm	1220x125x45
Tires	mm	Min. Ground Clearance (Mast)
	mm	140
	mm	Min. Ground Clearance (Middle of Chassis)
	mm	150
Performance	mm	Min. Turning Radius
	mm	2350
	-	Tire Tyre
	-	Pneumatic
System	-	Tire Number (X=Driving Tire)
	-	2x/2
	-	Front Tire
	-	28x9-15-14PR
Tires	-	Rear Tire
	-	18x7-8-14PR
Performance	Km/h	Travelling Speed (Loaded/Unloaded)
	Km/h	15/15
	mm/s	Lifting Speed (Loaded/Unloaded)
	mm/s	320/460
System	kN	Max. Drawbar Pull (Loaded/Unloaded)
	kN	20/19.5
	%	Max. Gradeability (Loaded/Unloaded)
	%	15/15
Tires	-	Power Unit Model
	-	35M1
	-	Power Unit Cooling Form
	-	Air Cooling
Performance	KW	Travelling Motor Power
	KW	25.0AC
	KW	Working Motor Power
	KW	25.0AC
System	V/Ah	Battery (Voltage/Capacity)
	V/Ah	80/280
Tires	V/A	Standard Charger Specifications (Output)
	V/A	80/150

The standard model data would vary according to the configuration.

HIFOUNE

SDN. BHD.



+60 11-5957 4199

For sales, support, parts or enquiries