



## HDS 8/17 C

Three-phase HDS 8/17 C hot water high-pressure cleaner with sophisticated operating and mobility concept, Easy Press trigger gun with Servo Control, eco!efficiency mode and single-button operation.



### 1 Efficiency

- eco!efficiency mode – efficient and environmentally friendly, even when used for prolonged periods.
- Reduces fuel consumption and CO2 emissions by 20%.

### 2 Ease of use

- Intuitive operation thanks to the large single-button selector switch.
- Large tank opening with filling chute.

### 3 Storage

- Lockable accessory compartment for nozzles, tools, etc.
- Storage hooks for power cable and high-pressure hose.

### 4 Mobility

- „Jogger“ design with large wheels and steering roller.
- Large integrated handles in the chassis.



## HDS 8/17 C

- Economical ecoefficiency mode
- Intuitive single-button selector switch
- Powerful three-phase motor

### Technical data

|  |                    |                  |
|--|--------------------|------------------|
| <b>Order no.</b>                                 | 1.174-309.0        |                  |
| <b>EAN code</b>                                  | 4039784717756      |                  |
| <b>Current type</b>                              | <b>Ph / V / Hz</b> | 3 / 400 / 50     |
| <b>Flow rate</b>                                 | <b>l/h</b>         | 290-760          |
| <b>Pressure</b>                                  | <b>bar / MPa</b>   | 30-170 / 3-17    |
| <b>Max. temperature</b>                          | <b>°C</b>          | 80 / 155         |
| <b>Connection load</b>                           | <b>kW</b>          | 5.7              |
| <b>Heating oil or gas consumption, full load</b> | <b>kg/h</b>        | 4.7              |
| <b>Fuel tank</b>                                 | <b>l</b>           | 15               |
| <b>Weight</b>                                    | <b>kg</b>          | 106              |
| <b>Dimensions (L × W × H)</b>                    | <b>mm</b>          | 1060 × 650 × 920 |

### Equipment

|   |                        |                    |
|---|------------------------|--------------------|
| <b>Spray gun</b>                          | Easy Press trigger gun |                    |
| <b>Spray gun with soft grip</b>           | ■                      |                    |
| <b>High-pressure hose</b>                 | <b>m</b>               | 10 / DN 6, 250 bar |
| <b>Spray lance</b>                        | <b>mm</b>              | 1050               |
| <b>Power nozzle</b>                       | ■                      |                    |
| <b>Soft Damping System (SDS)</b>          | ■                      |                    |
| <b>ANTI!Twist</b>                         | -                      |                    |
| <b>Pressure cut-off</b>                   | ■                      |                    |
| <b>Integrated fuel and detergent tank</b> | ■                      |                    |
| <b>Servo Control</b>                      | ■                      |                    |

■ Included in the scope of supply.

# HDS 8/17 C

## 1.174-309.0

**KÄRCHER**



|   |    | Order no.   | ID   | Max. working pressure | Length | Price | Description  |   |
|---|----|-------------|------|-----------------------|--------|-------|--|---|
| <b>Standard with unions on both sides</b>                                       |    |             |      |                       |        |       |  |   |
| High-pressure hose, 10 m, ID 8, 315 bar, extension                              | 1  | 6.391-342.0 | ID 8 | 315 bar               | 10 m   |       | To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.   | ▲ |
| High-pressure hose, 15 m, ID 8, 315 bar, including rotary coupling              | 2  | 6.390-010.0 | ID 8 | 315 bar               | 15 m   |       | With screw connections on both sides, M 22 x 1.5 with bend protection.   | ▲ |
| High-pressure hose, 20 m, ID 8, 315 bar, extension piece                        | 3  | 6.390-031.0 | ID 8 | 315 bar               | 20 m   |       | Screw connections at both ends, M 22 x 1.5, with kink protection.  | ▲ |
| High-pressure hose, 30 m, ID 8, incl. rotary coupling                           | 4  | 6.390-293.0 | ID 8 | 315 bar               | 30 m   |       | To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.   | ▲ |
| <b>Longlife 400 with unions on both sides</b>                                   |    |             |      |                       |        |       |  |   |
| High pressure hose ID 6, 10 m, including rotary coupling                        | 5  | 6.391-883.0 | ID 6 | 400 bar               | 10 m   |       | With rotary coupling, 2 x M 22 x 1.5   | ▲ |
| High-pressure hose Longlife 400, 10 m, ID 8, including rotary coupling          | 6  | 6.388-083.0 | ID 8 | 400 bar               | 10 m   |       | 10 m high-pressure hose Longlife 400 (DN 8) with rotary coupling, two layer high-strength steel wire reinforced. Connectors at both ends, M 22 x 1.5, with kink protection.                    | ▲ |
| High-pressure hose Longlife 400, 10 m, ID 8, extension                          | 7  | 6.391-354.0 | ID 8 | 400 bar               | 10 m   |       | To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.   | ▲ |
| High-pressure hose Longlife 400, 15 m, ID 8, including rotary coupling          | 8  | 6.389-709.0 | ID 8 | 400 bar               | 15 m   |       | With rotary coupling, 2 x M 22 x 1.5   | ▲ |
| High-pressure hose Longlife 400, 20 m, ID 8, extension                          | 9  | 6.390-027.0 | ID 8 | 400 bar               | 20 m   |       | with rotary coupling, 2 x M 22 x 1.5   | ▲ |
| High-pressure hose Longlife 400, 30 m, ID 8, including rotary coupling          | 10 | 6.390-294.0 | ID 8 | 400 bar               | 30 m   |       | With rotary coupling, 2 x M 22 x 1.5   | ▲ |
| High-pressure hose 1.5 m, ID 8, including connectors                            | 11 | 6.390-178.0 | ID 8 | 400 bar               | 1.5 m  |       | 1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).                            | □ |
| <b>Food industry version with unions on both sides</b>                          |    |             |      |                       |        |       |  |   |
| High-pressure hose, 10 m, DN 8, suitable for the food industry, extension piece | 12 | 6.389-479.0 | ID 8 | 250 bar               | 10 m   |       | 10 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. M 22 x 1.5 with anti-kink sleeve.                | ▲ |
| High-pressure hose, 20 m, ID 8, suitable for food industry, extension piece     | 13 | 6.389-581.0 | ID 8 | 250 bar               | 20 m   |       | 20 m high-pressure hose (DN 8) with swivel coupling. Non-discolouring outer layer for use in the food industry. Connectors at both ends, M 22 x 1.5, with kink protection. NW 8/155°C/250 bar. | ▲ |
| <b>Longlife food design with screw connections at both ends</b>                 |    |             |      |                       |        |       |  |   |
| High pressure hose food ID 8, 10 m  | 14 | 6.391-864.0 | ID 8 | 400 bar               | 10 m   |       | Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With rotary coupling, 2 x M 22 x 1.5  | ▲ |
| High-pressure hose food industry 400 bar, 20 m, ID 8, including rotary coupling | 15 | 6.391-887.0 | ID 8 | 400 bar               | 20 m   |       |  | ▲ |
| <b>Standard</b>   |    |             |      |                       |        |       |  |   |
| High-pressure hose, 10 m, ID 6, AVS trigger gun connector                       | 16 | 6.391-238.0 | ID 6 | 250 bar               | 10 m   |       | 10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 6/155°C/250 bar.                             | ■ |
| High-pressure hose, 10 m, ID 6, 300 bar, AVS trigger gun connection             | 17 | 6.391-875.0 | ID 6 | 300 bar               | 10 m   |       | With patented AVS connection in the trigger gun (pivot-mounted) and hand screw union. M 22 x 1.5 with anti-kink protection. NW 6/155°C/300 bar   | □ |
| High-pressure hose, 10 m, ID 8, AVS trigger gun connector                       | 18 | 6.390-025.0 | ID 8 | 315 bar               | 10 m   |       | 10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.                             | □ |

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

# HDS 8/17 C

## 1.174-309.0



|   | Order no. | ID          | Max. working pressure | Length  | Price | Description |   |                          |
|---|-----------|-------------|-----------------------|---------|-------|-------------|---|--------------------------|
| High-pressure hose, 15 m, ID 8, AVS trigger gun connector   | 19        | 6.390-185.0 | ID 8                  | 315 bar | 15 m  |             | 15 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.          | <input type="checkbox"/> |
| High-pressure hose, 20 m, ID 8, AVS trigger gun connector   | 20        | 6.390-171.0 | ID 8                  | 315 bar | 20 m  |             | 20 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.          | <input type="checkbox"/> |
| <b>Longlife 400</b>   |           |             |                       |         |       |             |   |                          |
| Longlife 400 high-pressure hose, 10 m, DN 6, M 22 x 1.5   | 21        | 6.391-882.0 | ID 6                  | 400 bar | 10 m  |             | With patented AVS connection in the trigger gun (pivot-mounted).  | <input type="checkbox"/> |
| High-pressure hose Longlife 400, 10 m, ID 8, AVS trigger gun connection                           | 22        | 6.391-351.0 | ID 8                  | 400 bar | 10 m  |             | With patented AVS connection in the trigger gun (rotatable) and hand screw connection, M 22 x 1.5 with kink protection. With double steel reinforcement.                    | <input type="checkbox"/> |
| High-pressure hose Longlife 400, 20 m, DN 8, AVS trigger gun connector                            | 23        | 6.390-208.0 | ID 8                  | 400 bar | 20 m  |             | 20 m high-pressure hose Longlife 400 (DN 8) with patented (rotating) AVS trigger gun connector and manual coupling. Two layer high-strength steel wire reinforced.          | <input type="checkbox"/> |
| <b>Food industry version</b>  |           |             |                       |         |       |             |   |                          |
| High-pressure hose, 15 m, ID 6, AVS trigger gun connector 11 mm, suitable for food industry, grey | 24        | 6.391-654.0 | ID 6                  | 250 bar | 15 m  |             | 15 m high-pressure hose (DN 6) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. DN 6/155°C/250 bar.           | <input type="checkbox"/> |
| High-pressure hose, 10 m, DN 8, AVS trigger gun connection, food, grey                            | 25        | 6.390-704.0 | ID 8                  | 250 bar | 10 m  |             | Food industry version, AVS connection in the trigger gun. grey NW 8/155 °C/250 bar  | <input type="checkbox"/> |
| High-pressure hose, 20 m, ID 8, AVS trigger gun connector, suitable for food industry, grey       | 26        | 6.390-705.0 | ID 8                  | 250 bar | 20 m  |             | 20 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. NW 8/155°C/250 bar.           | <input type="checkbox"/> |
| <b>Longlife food design</b>   |           |             |                       |         |       |             |   |                          |
| High-pressure hose Longlife 400, 15 m, ID 6, AVS trigger gun connection                           | 27        | 6.391-888.0 | ID 6                  | 400 bar | 15 m  |             | Longlife HP hose for use in the food industry. Außendecke animal-grease-resistant, non-colour-bleeding material. With patented AVS connection in the pistol (pivot mounted) | <input type="checkbox"/> |
| High-pressure hose Longlife 400, 10 m, ID 8, AVS trigger gun connection                           | 28        | 6.391-885.0 | ID 8                  | 400 bar | 10 m  |             |   | <input type="checkbox"/> |
| High-pressure hose Longlife 400, 20 m, ID 8, AVS trigger gun connection                           | 29        | 6.391-886.0 | ID 8                  | 400 bar | 20 m  |             |   | <input type="checkbox"/> |
| <b>Special hoses</b>  |           |             |                       |         |       |             |   |                          |
| High-pressure hose, 1.5 m, ID 8, incl. connection parts, curved outflow                           | 30        | 6.388-886.0 | ID 8                  | 400 bar | 1.5 m |             | Connection hose in longlife quality with 2x M22 x 1.5, with angled connection on one side.  | <input type="checkbox"/> |

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

# HDS 8/17 C

## 1.174-309.0



|   |   | Order no.   | Flow rate |  |  |  | Price | Description   |   |
|---|---|-------------|-----------|--|--|--|-------|---|---|
| <b>Easy Press high-pressure trigger gun with holding force reduction (Kärcher patent)</b> |   |             |           |  |  |  |       |   |   |
| Easy Press HP trigger gun with soft grip  | 1 | 4.775-463.0 |           |  |  |  |       | Easy press high-pressure trigger gun with softgrip. For high-pressure hoses DN 6 and DN 8 with 11 mm swivel diameter.   | ■ |
| Easy Press HP trigger gun with soft grip, M22 x 1.5                                       | 2 | 4.775-466.0 |           |  |  |  |       | Easy press high-pressure trigger gun with integrated adapter for connecting to high-pressure hoses M 22 x 1.5.  | □ |
| <b>Servo control</b>  |   |             |           |  |  |  |       |   |   |
| Servo control   | 3 | 4.775-526.0 | 0-750 l/h |  |  |  |       | Servo control for water flow and pressure control (< 750 l/h) on trigger gun.   | ■ |
| <b>Trigger guns</b>   |   |             |           |  |  |  |       |   |   |
| High-end HP trigger gun   | 4 | 4.775-823.0 |           |  |  |  |       | High-end spray guns with optimised flow. Small pressure losses also with water volumes up to 2500 l/h. Robustness and durability for professional use. Food-safe and saltwater-resistant materials offer the best conditions for use in the food sector and in industry. Connector for HP hoses M 22 x 1.5. | □ |
| <b>Quick connect</b>  |   |             |           |  |  |  |       |   |   |
| Quick coupling  | 5 | 6.401-458.0 |           |  |  |  |       | For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 x 1.5 internal thread.   | □ |
| Male coupling   | 6 | 6.401-459.0 |           |  |  |  |       | Hardened stainless steel male coupling for quick coupling 6.401-458. With M 22 x 1.5 external thread.   | □ |

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

# HDS 8/17 C

## 1.174-309.0



|  |    | Order no.   | Max. working pressure | Length  |  | Price | Description   |   |
|--|----|-------------|-----------------------|---------|--|-------|---|---|
| <b>Rotating spray lances</b>             |    |             |                       |         |  |       |   |   |
| 1050 mm spray pipe, rotatable            | 1  | 4.760-660.0 | 300 bar               | 1050 mm |  |       | 1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.  | ■ |
| 600 mm spray pipe, rotatable             | 2  | 4.760-664.0 | 300 bar               | 600 mm  |  |       | 600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.   | □ |
| Spray lance, 840 mm, rotatable           | 3  | 4.760-663.0 | 300 bar               | 840 mm  |  |       | 850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.   | □ |
| 1550 mm spray pipe, rotatable            | 4  | 4.760-661.0 | 300 bar               | 1550 mm |  |       | 1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.  | □ |
| 2050 mm spray pipe, rotatable            | 5  | 4.760-662.0 | 300 bar               | 2050 mm |  |       | 2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.  | □ |
| <b>Spray lance</b>                       |    |             |                       |         |  |       |   |   |
| 250 mm lance, non-rotatable              | 6  | 4.760-667.0 |                       | 250 mm  |  |       | 250 mm stainless steel lance. With manual coupling. Non-rotatable.  | □ |
| Vibrasoft lance                          | 7  | 6.415-951.0 | 250 bar               | 950 mm  |  |       | The spring-loaded 360° loop handle significantly reduces the vibrations on the spray lance, reducing the physical burden on the user, e.g. when working with the dirt blaster.  | □ |
| <b>Angular spray lance</b>               |    |             |                       |         |  |       |   |   |
| Spray lance for toilets and rain gutters | 8  | 4.760-073.0 |                       |         |  |       | Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.  | □ |
| <b>Flexible spray lance</b>              |    |             |                       |         |  |       |   |   |
| Flexible lance 1050 mm                   | 9  | 6.394-654.0 | 210 bar               | 1050 mm |  |       | 1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.  | □ |
| High-pressure M18x1.5 articulated joint  | 10 | 4.481-039.0 | 300 bar               |         |  |       | High-pressure articulated joint: Thanks to infinite angle adjustment up to 120°, this tool is ideal to effortlessly clean hard-to-reach areas. Simply attach to the spray lance of the pressure washer.                                     | □ |
| <b>Telescopic spray lance</b>            |    |             |                       |         |  |       |   |   |
| Telescopic spray lance                   | 11 | 6.394-690.0 | 225 bar               | 5400 mm |  |       | Can be continuously extended from 1.8 to 5.4 m. For cleaning areas that are difficult to reach, such as ceilings or facades. With integrated HD trigger gun, M 22 x 1.5 connection with rotary coupling. Connection for M 18 x 1.5 nozzles. | □ |
| Strap for telescopic spray pipe          | 12 | 6.373-987.0 |                       |         |  |       | Convenient strap for relief when working with the telescopic spray lance (6.394-690). The burden is optimally distributed on the body and longer periods of use are possible.   | □ |
| <b>Gutter cleaner</b>                    |    |             |                       |         |  |       |   |   |
| Gutter cleaning lance                    | 13 | 2.642-305.0 |                       |         |  |       | The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.   | □ |
| <b>Undercarriage spray lance</b>         |    |             |                       |         |  |       |   |   |
| Underbody lance                          | 14 | 4.760-245.0 |                       | 700 mm  |  |       | Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.   | □ |
| <b>Weed control</b>                      |    |             |                       |         |  |       |   |   |
| WR 50                                    | 15 | 2.643-758.0 |                       |         |  |       | In combination with a hot water high-pressure cleaner from Kärcher, the 50 cm wide weed remover WR 50 is ideal for removing weeds. It comes with an adaptive chassis and nozzle adapter.  | □ |

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

# HDS 8/17 C

## 1.174-309.0




|       |    | Order no.   | Max. working pressure | Length |  |  | Price | Description  |                          |
|-------|----|-------------|-----------------------|--------|--|--|-------|--|--------------------------|
| WR 20 | 16 | 2.643-760.0 |                       |        |  |  |       | For thorough weed removal: The WR 20 weed remover for use with a hot water high-pressure cleaner from Kärcher. Equipped with a 20 cm wide nozzle bar and nozzle adapter. | <input type="checkbox"/> |

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

# HDS 8/17 C

## 1.174-309.0

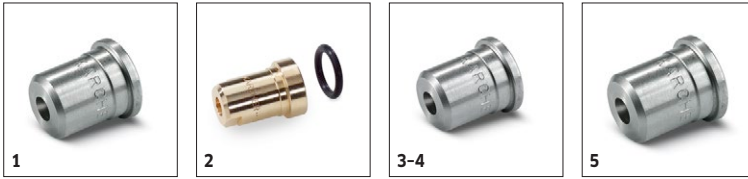

|   |   | Order no.   | Nozzle size |  |  |  | Price | Description   |   |
|---|---|-------------|-------------|--|--|--|-------|---|---|
| <b>Power nozzle spray angle 25°</b>         |   |             |             |  |  |  |       |   |   |
| Power nozzle spray angle 25°                | 1 | 2.883-831.0 | 42          |  |  |  |       | Flat stream large area coverage and stubborn dirt and contaminations.                             | ■ |
| 25° power nozzle for cleaning agent suction | 2 | 2.884-521.0 | 250         |  |  |  |       | Brass power nozzle for low pressure operation and cleaning agent suction.                         | □ |
| <b>Power nozzle spray angle 15°</b>         |   |             |             |  |  |  |       |   |   |
| Power nozzle spray angle 15°                | 3 | 2.883-389.0 | 45          |  |  |  |       | Fan jet nozzle with 15° spray angle suitable for stubborn dirt.                                   | □ |
| <b>Power nozzle spray angle 40°</b>         |   |             |             |  |  |  |       |   |   |
| Power nozzle spray angle 40°                | 4 | 2.884-523.0 | 45          |  |  |  |       | Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces. | □ |
| <b>HP nozzle spray angle 0°</b>             |   |             |             |  |  |  |       |   |   |
| High-pressure nozzle spray angle 0°         | 5 | 2.884-534.0 | 45          |  |  |  |       | High-pressure nozzle with powerful jet for extremely stubborn dirt.                               | □ |

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

# HDS 8/17 C

## 1.174-309.0



|                                  |   | Order no.   | Max. working pressure | Nozzle size |  |  | Price | Description   |                          |
|----------------------------------|---|-------------|-----------------------|-------------|--|--|-------|---|--------------------------|
| <b>Dirt Blaster, small</b>       |   |             |                       |             |  |  |       |   |                          |
| Dirt blaster                     | 1 | 4.767-100.0 | 180 bar               | 45          |  |  |       | The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 180 bar, 18 MPa, 60°C. | <input type="checkbox"/> |
| <b>Dirt blaster, large</b>       |   |             |                       |             |  |  |       |   |                          |
| Dirt blaster                     | 2 | 4.763-988.0 | 300 bar               | 45          |  |  |       | The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C. | <input type="checkbox"/> |
| <b>Angled vario nozzle 0-90°</b> |   |             |                       |             |  |  |       |   |                          |
| Spezial nozzle 0005              | 3 | 4.763-039.0 |                       | 50          |  |  |       | Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of soiling and surfaces.  | <input type="checkbox"/> |

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.



# HDS 8/17 C

## 1.174-309.0



|                  |    | Order no.   |  |  |  |  | Price | Description   |                          |
|------------------|----|-------------|--|--|--|--|-------|---|--------------------------|
| <b>Flue pipe</b> |    |             |  |  |  |  |       |   |                          |
| Flue gas adapter | 22 | 4.656-149.0 |  |  |  |  |       | Flue gas adapter with draught damper for flue pipe connection (adapter for HDS burners for connection to a stack system). | <input type="checkbox"/> |
|                  | 23 | 4.656-080.0 |  |  |  |  |       |   | <input type="checkbox"/> |

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.



# HDS 8/17 C

## 1.174-309.0

**KÄRCHER**



|   |    | Order no.   | Flow rate   | Nozzle size | Diame-ter | Price | Description  |                          |
|---|----|-------------|-------------|-------------|-----------|-------|--|--------------------------|
| <b>Hard Surface Cleaner FRV 30</b>          |    |             |             |             |           |       |  |                          |
| FRV 30 surface cleaner                      | 1  | 2.642-999.0 |             |             |           |       | With the integrated and automatic suction of the dirty water, the FRV 30 makes surface cleaning even more efficient. There is no longer a need to rinse the surface after cleaning, as the dirty water can be removed through the 5m suction hose, which is supplied. Additional features include the non-marking steering rollers and double ceramic bearings. Machine specific nozzle kit must be ordered separately.  | <input type="checkbox"/> |
| Rubber lip for FRV 30                       | 2  | 2.642-910.0 |             |             |           |       | For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes.  | <input type="checkbox"/> |
| Hose fastening attachment kit               | 3  | 2.642-528.0 |             |             |           |       | Suction cup for fixing the suction hose to smooth surfaces.  | <input type="checkbox"/> |
| Dirt trap attachment kit                    | 4  | 2.642-532.0 |             |             |           |       | Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas.   | <input type="checkbox"/> |
| <b>FR 30 Me surface cleaner</b>             |    |             |             |             |           |       |  |                          |
| Hard Surface Cleaner FR 30 Me               | 5  | 2.111-013.0 |             |             | 300 mm    |       | Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.   | <input type="checkbox"/> |
| Hard surface cleaner FR 30 Me               | 6  | 2.640-355.0 |             |             | 300 mm    |       |  | <input type="checkbox"/> |
| <b>Hard Surface Cleaner FR 50</b>           |    |             |             |             |           |       |  |                          |
| Hard surface cleaner FR 50                  | 7  | 2.640-679.0 |             |             | 500 mm    |       | Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.   | <input type="checkbox"/> |
| Surface Cleaner FR 50 Me                    | 8  | 2.111-023.0 |             |             | 500 mm    |       |  | <input type="checkbox"/> |
| <b>Machine-specific nozzle kits for FR</b>  |    |             |             |             |           |       |  |                          |
| Nozzle kit for surface cleaners             | 9  | 2.639-187.0 | 650-850 l/h |             |           |       | Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (650 to 850 l/h).   | <input type="checkbox"/> |
| <b>Machine-specific nozzle kits for FRV</b> |    |             |             |             |           |       |  |                          |
| Nozzle kit 045 - for FRV                    | 10 | 2.642-432.0 |             | 45          |           |       | Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30.  | <input type="checkbox"/> |
| <b>FRV 30 Me surface cleaner</b>            |    |             |             |             |           |       |  |                          |
| FRV 30 Me                                   | 11 | 2.642-911.0 |             |             |           |       | Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C.   | <input type="checkbox"/> |
| Extension hose FRV 30 Me and FRV 50 Me      | 12 | 4.441-040.0 |             |             |           |       | 5 m extension hose for FRV 30 Me. Includes connecting adapter.   | <input type="checkbox"/> |
| <b>Surface Cleaner FR 50 Me</b>             |    |             |             |             |           |       |  |                          |
| FRV 50 ME                                   | 13 | 2.643-598.0 |             |             |           |       | Thanks to automatic suction of the waste water, the stainless steel FRV 50 Me surface cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85 °C. The FRV 50 Me features a temperature-resistant 7.5 m polyurethane suction hose. Additional quality features are the non-marking steering rollers and double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 1,300 l/h / 85 °C. | <input type="checkbox"/> |

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

# HDS 8/17 C

## 1.174-309.0



|  |   | Order no.   | Flow rate    |  |  |  | Price | Description  |                          |
|--|---|-------------|--------------|--|--|--|-------|--|--------------------------|
| <b>Cup foam lance</b>                            |   |             |              |  |  |  |       |  |                          |
| Cup foam lance                                   | 1 | 6.394-668.0 | 1200 l/h     |  |  |  |       | Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.  | <input type="checkbox"/> |
| 1-litre cleaning agent container for foam lance  | 2 | 6.414-954.0 |              |  |  |  |       | Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 6.394-668)   | <input type="checkbox"/> |
| <b>Inno Foam Kit</b>                             |   |             |              |  |  |  |       |  |                          |
| Inno Foam Set with detergent injector            | 3 | 2.640-151.0 |              |  |  |  |       | High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.                                  | <input type="checkbox"/> |
| Inno Foam Set                                    | 4 | 2.640-692.0 |              |  |  |  |       |  | <input type="checkbox"/> |
| <b>Easy Foam Set</b>                             |   |             |              |  |  |  |       |  |                          |
| Easy Foam Set with RM injector                   | 5 | 2.640-691.0 |              |  |  |  |       | HP foam system for use with HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately. | <input type="checkbox"/> |
| Easy Foam Set                                    | 6 | 2.640-693.0 |              |  |  |  |       |  | <input type="checkbox"/> |
| <b>Nozzle kits for Inno/Easy Foam Set</b>        |   |             |              |  |  |  |       |  |                          |
| Nozzle kit 090 for Inno / Easy Set 700-1,000 l/h | 7 | 2.640-688.0 | 700-1000 l/h |  |  |  |       | Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.  | <input type="checkbox"/> |
| <b>Foam nozzle mounting kit</b>                  |   |             |              |  |  |  |       |  |                          |
| Foam nozzle attachment kit                       | 8 | 2.637-926.0 |              |  |  |  |       | Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.   | <input type="checkbox"/> |

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

# HDS 8/17 C

## 1.174-309.0



|  |    | Order no.   | Length |  |  |  | Price | Description  |                          |
|--|----|-------------|--------|--|--|--|-------|--|--------------------------|
| <b>Manual hose reel attachment kit</b>                       |    |             |        |  |  |  |       |  |                          |
| Hose reel attachment kit, plastic, for HDS compact class     | 1  | 2.642-756.0 | 20 m   |  |  |  |       | Hose reel attachment kit for attaching to the machine. For secure and space-saving storage of the high-pressure hose (with a connection hose for the machine HP output). Rotatable under pressure with connection for male coupling.                             | <input type="checkbox"/> |
| <b>Automatic, self-winding hose reels for wall mounting</b>  |    |             |        |  |  |  |       |  |                          |
| Powder-coated swivel holder                                  | 2  | 2.639-931.0 |        |  |  |  |       | Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.  | <input type="checkbox"/> |
| Stainless steel swivel holder                                | 3  | 2.641-867.0 |        |  |  |  |       | Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.   | <input type="checkbox"/> |
| Automatic hose reel, powder-coated steel / plastic           | 4  | 6.392-975.0 | 20 m   |  |  |  |       | Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.  | <input type="checkbox"/> |
| Automatic stainless steel / synthetic material hose drum     | 5  | 6.392-965.0 | 20 m   |  |  |  |       | Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.   | <input type="checkbox"/> |
| Automatic hose reel, coated                                  | 6  | 2.639-919.0 | 20 m   |  |  |  |       | Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.   | <input type="checkbox"/> |
| Automatic hose reel, stainless steel, includes swivel holder | 7  | 6.391-421.0 | 20 m   |  |  |  |       | Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.   | <input type="checkbox"/> |
| ABS automatic stainless steel hose drum                      | 8  | 2.641-866.0 | 20 m   |  |  |  |       | High-grade, automatic steel hose reel. Especially suitable for use in the food industry. The material and finish provide for a corrosion-resistant, watertight capsuled sprong drive. Connection for HP hoses with nipple.                                       | <input type="checkbox"/> |
| <b>Automatic, self-winding hose reel attachment kit</b>      |    |             |        |  |  |  |       |  |                          |
| ABS automatic hose drum HDS C                                | 9  | 2.643-052.0 |        |  |  |  |       | Complete automatic hose reel attachment kit for HDS compact class. Simple installation and all unit functions are available. Offers maximum convenience when winding and unwinding the HP hose. Contains: automatic hose reel, HP hose and all connection parts. | <input type="checkbox"/> |
| ABS holder, automatic hose drum HDS C                        | 10 | 2.643-181.0 |        |  |  |  |       | Holder includes connection material for installing an automatic hose reel to machines from the HDS compact class.  | <input type="checkbox"/> |

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

# HDS 8/17 C

## 1.174-309.0



|   |   | Order no.   | Flow rate | Inlet temperature | Length | Length | Price | Description  |                          |
|---|---|-------------|-----------|-------------------|--------|--------|-------|--|--------------------------|
| <b>Solar cleaning - telescopic lances</b> |   |             |           |                   |        |        |       |  |                          |
| iSolar HP hose 7                          | 1 | 6.392-978.0 |           | max. 155 °C       |        |        |       | High-quality, flexible HP hose (with rubber covering) for the iSolar TL 7. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.  | <input type="checkbox"/> |
| iSolar HP hose 10                         | 2 | 6.392-977.0 |           | max. 155 °C       |        |        |       | High-quality, flexible HP hose (with rubber covering) for the iSolar TL 10. The outer layer has especially good sliding properties when extending and retracting the telescopic rod. | <input type="checkbox"/> |
| iSolar HP hose 14                         | 3 | 6.392-976.0 |           | max. 155 °C       |        |        |       | High-quality, flexible HP hose (with rubber covering) for the iSolar TL 14. The outer layer has especially good sliding properties when extending and retracting the telescopic rod. | <input type="checkbox"/> |

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

# HDS 8/17 C

## 1.174-309.0



|   |   | Order no.   | Nozzle size |  |  |  | Price | Description  |                          |
|---|---|-------------|-------------|--|--|--|-------|--|--------------------------|
| <b>Wet blasting attachment (without nozzle)</b>                     |   |             |             |  |  |  |       |  |                          |
| Wet blasting attachment with flow control (without nozzles)         | 1 | 4.762-010.0 |             |  |  |  |       | Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.  | <input type="checkbox"/> |
| Wet blasting attachment without flow control (nozzles not included) | 2 | 4.762-022.0 |             |  |  |  |       | Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.                          | <input type="checkbox"/> |
| <b>Nozzle kits for wet jet unit</b>                                 |   |             |             |  |  |  |       |  |                          |
| Nozzle kit for wet jet unit 045                                     | 3 | 2.637-901.0 | 45          |  |  |  |       | Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.762-010/-022. | <input type="checkbox"/> |
| <b>Boron carbide nozzle</b>   |   |             |             |  |  |  |       |  |                          |
| Boron carbide nozzle, for machines up to 1,000 l/h                  | 4 | 6.415-084.0 | 6 mm        |  |  |  |       | In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.  | <input type="checkbox"/> |

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

# HDS 8/17 C

## 1.174-309.0



|   |   | Order no.   |  |  |  |  | Price | Description  |                          |
|---|---|-------------|--|--|--|--|-------|--|--------------------------|
| <b>Attachment kit for transport</b>                   |   |             |  |  |  |  |       |  |                          |
| Crane loading attachment kit for HDS compact class    | 1 | 2.642-638.0 |  |  |  |  |       | Effortless loading by crane.   | <input type="checkbox"/> |
| <b>Flame monitoring attachment kit</b>                |   |             |  |  |  |  |       |  |                          |
| Flame monitoring attachment kit for HDS Compact Class | 2 | 2.642-711.0 |  |  |  |  |       | A light sensor monitors the burner flame. The fuel supply is shut off if the flame goes out. | <input type="checkbox"/> |

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

# HDS 8/17 C

## 1.174-309.0



|   |    | Order no.   | Length | Diameter |  | Price | Description  |                          |
|---|----|-------------|--------|----------|--|-------|--|--------------------------|
| <b>Geka coupling</b>                      |    |             |        |          |  |       |  |                          |
| Geka connector with hose barb, R 1/2"     | 1  | 6.388-461.0 |        |          |  |       | with hose liner  | <input type="checkbox"/> |
| Geka connector with hose barb, R 3/4"     | 2  | 6.388-455.0 |        |          |  |       |  | <input type="checkbox"/> |
| Geka connector with hose barb, R 1"       | 3  | 6.388-465.0 |        |          |  |       | with hose barb   | <input type="checkbox"/> |
| Geka connector with internal thread, R 1" | 4  | 6.388-458.0 |        |          |  |       | with female thread   | <input type="checkbox"/> |
| <b>Suction filter</b>                     |    |             |        |          |  |       |  |                          |
| Water suction filter                      | 5  | 6.414-956.0 |        |          |  |       | Suitable for ponds, storage tanks or similar, polyamide filter casing, stainless steel strainer, 800 µm mesh, R 3/4" and R 1" connection, without non-return valve   | <input type="checkbox"/> |
| Suction filter with check valve           | 6  | 4.730-012.0 |        |          |  |       | Brass suction filter suitable for ponds, storage tanks, etc. With check valve.   | <input type="checkbox"/> |
| <b>Water fine filter</b>                  |    |             |        |          |  |       |  |                          |
| Water fine filter, with adapter           | 7  | 4.730-102.0 |        |          |  |       | Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".               | <input type="checkbox"/> |
| Water fine filter, 100 µm, R 1"           | 8  | 2.638-270.0 |        |          |  |       | Fine-mesh water filter, 100 µm, max. temperature 60°C. Connects to high-pressure cleaner. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connector 1". | <input type="checkbox"/> |
| <b>Water supply hose</b>                  |    |             |        |          |  |       |  |                          |
| Water supply hose                         | 9  | 4.440-038.0 | 7.5 m  |          |  |       | NW 13 R1" / R 3/4", up to 30 °C  | <input type="checkbox"/> |
|   | 10 | 4.440-207.0 | 7.5 m  |          |  |       | NW 19 R1" / R 3/4", up to 85 °C, for pick-up   | <input type="checkbox"/> |
|   | 11 | 4.440-270.0 | 7.5 m  |          |  |       | NW 19 R1" / R1", up to 85 °C   | <input type="checkbox"/> |
| <b>Other HP Accessories</b>               |    |             |        |          |  |       |  |                          |
| Coin remote control                       | 12 | 2.644-029.0 |        |          |  |       | Coin remote control with electronic coin acceptor for connecting a high-pressure cleaner as a pre-wash device. Please have the power outlet and cable provided on site.  | <input type="checkbox"/> |

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.

# HDS 8/17 C

## 1.174-309.0



|  |   | Order no.   | Flow rate   |  |  |  | Price | Description  |                          |
|--|---|-------------|-------------|--|--|--|-------|--|--------------------------|
| <b>Push-on washing brush</b>                                 |   |             |             |  |  |  |       |  |                          |
| Push-on wash brush   | 1 | 4.762-016.0 |             |  |  |  |       | For general-purpose cleaning of all surfaces. Clamps directly onto the spray lance. Connection M 18 x 1.5  | <input type="checkbox"/> |
| <b>Rotating washing brush</b>                                |   |             |             |  |  |  |       |  |                          |
| Rotating wash brush for < 800 l/h machines, nylon bristles   | 2 | 4.762-561.0 | 500-800 l/h |  |  |  |       | The rotating wash brush gently removes fine dust and traffic film from all surfaces. Temperature resistant up to 60°C. (M 18 x 1.5, replaceable brush insert). | <input type="checkbox"/> |
| Rotating wash brush for < 800 l/h machines, natural bristles | 3 | 4.762-560.0 | 500-800 l/h |  |  |  |       | Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 x 1.5 (replaceable brush insert).   | <input type="checkbox"/> |

■ Included in the scope of supply. □ Available accessories. ▲ Extension hose.