


NPD series designed for applications that typically discharge 60% to 70% or more of the battery capacity. The battery is typically feature thick plates with high density active material. The thick battery plates allow for reserve energy to be stored deep within the battery plates and released during slow discharging such as trolling or solar applications. The high density material remains within the batteries' plate/grid structure longer, resisting the normal degradation found in cycling conditions. The battery is typically used for great extent discharge and recharged. The battery uses a different chemistry for the plates' active paste material and a slightly stronger acid. This chemistry allows for a much longer life in deep cycle applications with only a slightly reduction in maximum power output.

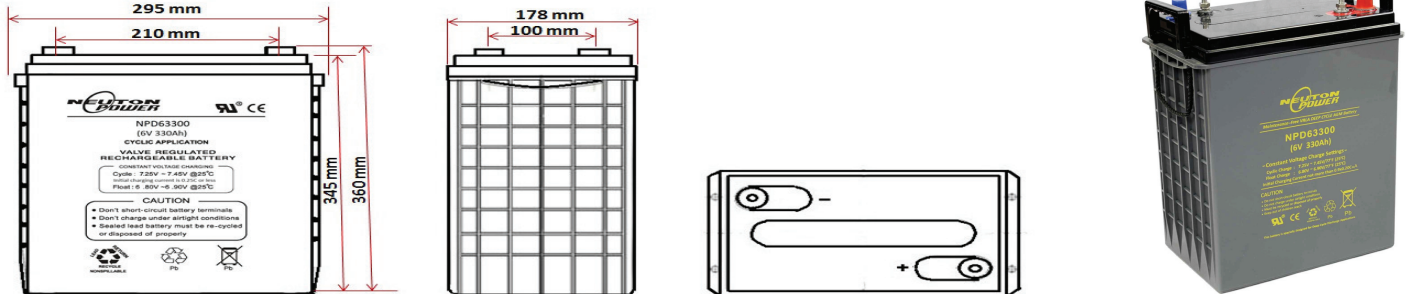

Performance Characteristics		
<b>General Information</b>	Length	295 mm
	Width	178 mm
	Height	345 mm
	Total Height	366 mm
	Approx Weight	46.6 kg ± 3%
	Nominal Voltage	6 Volt
	Number of Cells	3
	Nominal Capacity (20 hour rate)	330 Ah
	Terminal	DT
	<b>Casing Material</b>	Standard
Optional - UL94 V0, Flame Retardant		ABS
<b>Nominal Capacity 77°F (25°C)</b>	20 hour rate @ 1.80V (16.5A)	330 Ah
	10 hour rate @ 1.80V (29.7A)	297 Ah
	5 hour rate @ 1.70V (53.5A)	267 Ah
<b>Internal Resistance</b>	Fully Charged Battery 77°F (25°C) ≤ 1.8 mΩ	
<b>Max. Discharge current in 5 sec</b>	2000 A	
<b>Capacity affected by Temperature</b>	104°F (40°C) @ 20 hour rate	102%
	77°F (25°C) @ 20 hour rate	100%
	32°F (0°C) @ 20 hour rate	85%
	5°F (-15°C) @ 20 hour rate	65%
<b>Reserve capacity to 10.5V at 27°C (the number of minutes a battery at 25A or 75A)</b>	@ 25Amps	680 mins
	@ 75Amps	180 mins
<b>Constant voltage charging @ 77°F (25°C)</b>	Initial charging current	≤ 59.4 A
	Boost charging voltage	7.20V to 7.45V
	Float charging voltage	6.80V to 6.90V

Constant Current Discharge Data (Amperes at 25°C)											
End Point Volts/Cell	10min	15min	30min	45min	1hr	2hr	3hr	5hr	8hr	10hr	20hr
1.60V	499.1	424.7	270.4	199.7	183.3	116.3	81.7	55.5	36.7	32.7	18.2
1.65V	490.1	417.0	265.5	196.0	180.0	114.2	80.2	54.5	36.0	32.1	17.8
1.70V	481.0	409.3	260.6	192.0	176.6	112.1	78.7	53.5	35.3	31.5	17.5
1.75V	471.9	401.5	255.7	188.8	173.3	110.0	77.2	52.5	34.7	30.9	17.2
1.80V	453.8	386.1	245.9	181.5	166.7	105.8	74.3	50.5	33.3	29.7	16.5

Constant Power Discharge Data (Watts per cell at 25°C)											
End Point Volts/Cell	10min	15min	30min	45min	1hr	2hr	3hr	5hr	8hr	10hr	20hr
1.60V	960.8	817.6	520.6	384.3	352.9	224.0	157.2	106.9	70.6	62.9	34.9
1.65V	943.3	802.7	511.1	377.3	346.5	219.9	154.4	105.0	69.3	61.7	34.3
1.70V	925.9	787.8	501.7	370.4	340.0	215.8	151.5	103.0	68.0	60.6	33.7
1.75V	908.4	773.0	492.2	363.4	333.6	211.7	148.6	101.1	66.7	59.5	33.0
1.80V	873.5	743.2	473.3	349.4	320.8	203.6	142.9	97.2	64.2	57.2	31.8

Above data provided from tested samples is generally for descriptive only. It is not intent to make or imply any representation; guarantee or warranty with respect to any battery cell. Battery cell designs/specifications are subject to modify without prior notice.