




Work range diagram (SK210 / ISK70)

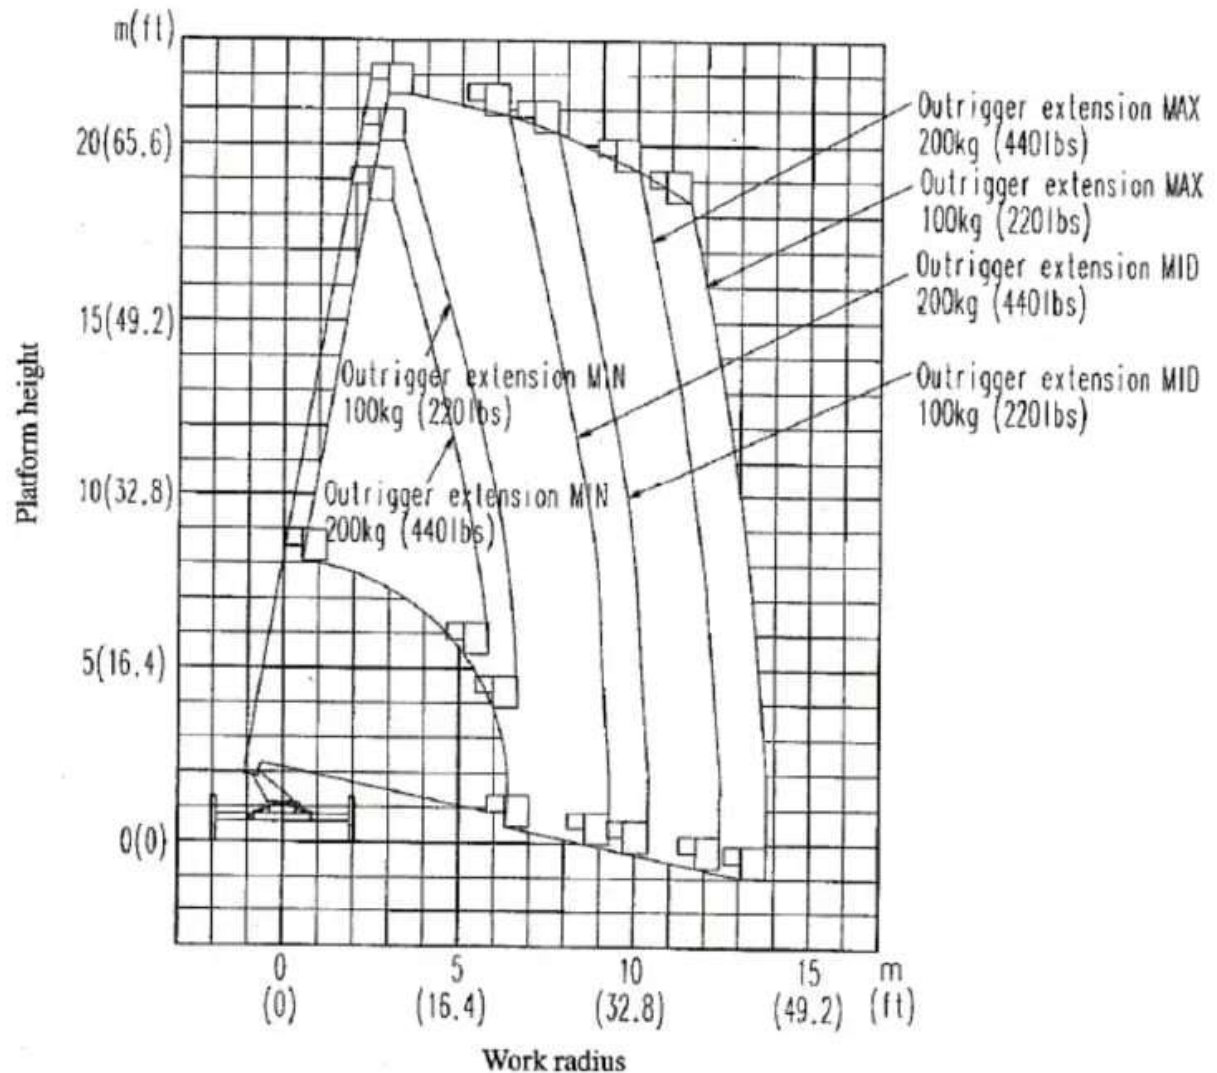

The work radius shown in the diagram is obtained corresponding to each outrigger extension when the boom is rotated either to right or left center of the chassis. When the boom is rotated to the front or rear range of the chassis shown in the figure below, the largest work radius that is equivalent to outrigger extension MAX is always obtained regardless of the outrigger extensions.



Outrigger extension minimum (MIN)

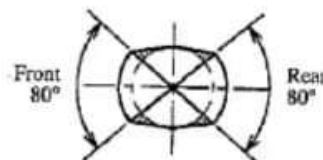

Outrigger extension middle (MID)