


Sumitomo SH200 Hydraulic Excavator

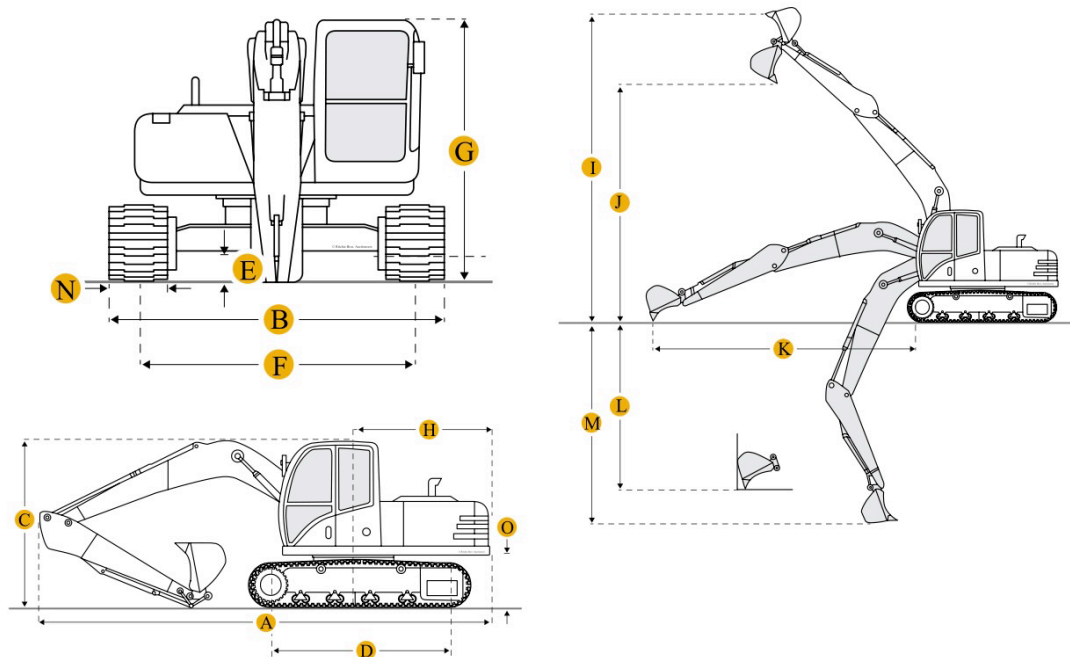

Units

Imperial

Metric

Dimensions

Boom/Stick Option (Hex) 1

A	Shipping Length Of Unit	9440 mm
C	Shipping Height Of Unit	2860 mm
I	Max Cutting Height	9260 mm
J	Max Loading Height	6460 mm
K	Max Reach Along Ground	9420 mm
L	Max Vertical Wall Digging Depth	5470 mm
M	Max Digging Depth	6100 mm

Boom/Stick Option (Hex) 1

Boom / Stick 2400mm

Boom/Stick Option (Hex) 2

A	Shipping Length Of Unit	9440 mm
I	Max Cutting Height	9470 mm
C	Shipping Height Of Unit	2860 mm
J	Max Loading Height	6670 mm
K	Max Reach Along Ground	9950 mm
L	Max Vertical Wall Digging Depth	6070 mm
M	Max Digging Depth	6690 mm

Boom/Stick Option (Hex) 2

Boom / Stick 3000mm

Dimensions

E	Ground Clearance	460 mm
G	Height To Top Of Cab	2860 mm
B	Width To Outside Of Tracks	2800 mm
D	Length Of Track On Ground	3370 mm
H	Tail Swing Radius	2770 mm
	Removal Counterweight Clearance	1040 mm

Undercarriage

F	Track Gauge	2200 mm
N	Shoe Size	600 mm
	Max Travel Speed	5.5 km/h
	Ground Pressure	42.13 kPa

Specifications

Engine		
Engine Make		2353
Engine Model		6BD1T
Net Power		95.5 kw
Power Measured @		2020 rpm
Displacement		5.8 L
Operational		
Operating Weight		19010 kg
Fuel Capacity		310 L
Hydraulic System Fluid Capacity		220 L
Hydraulic System Relief Valve Pressure		31371.2 kPa
Swing Mechanism		
Swing Speed		11.9 rpm
Buckets		
Reference Bucket Capacity		0.7 m3
Minimum Bucket Capacity		0.5 m3
Maximum Bucket Capacity		1 m3