


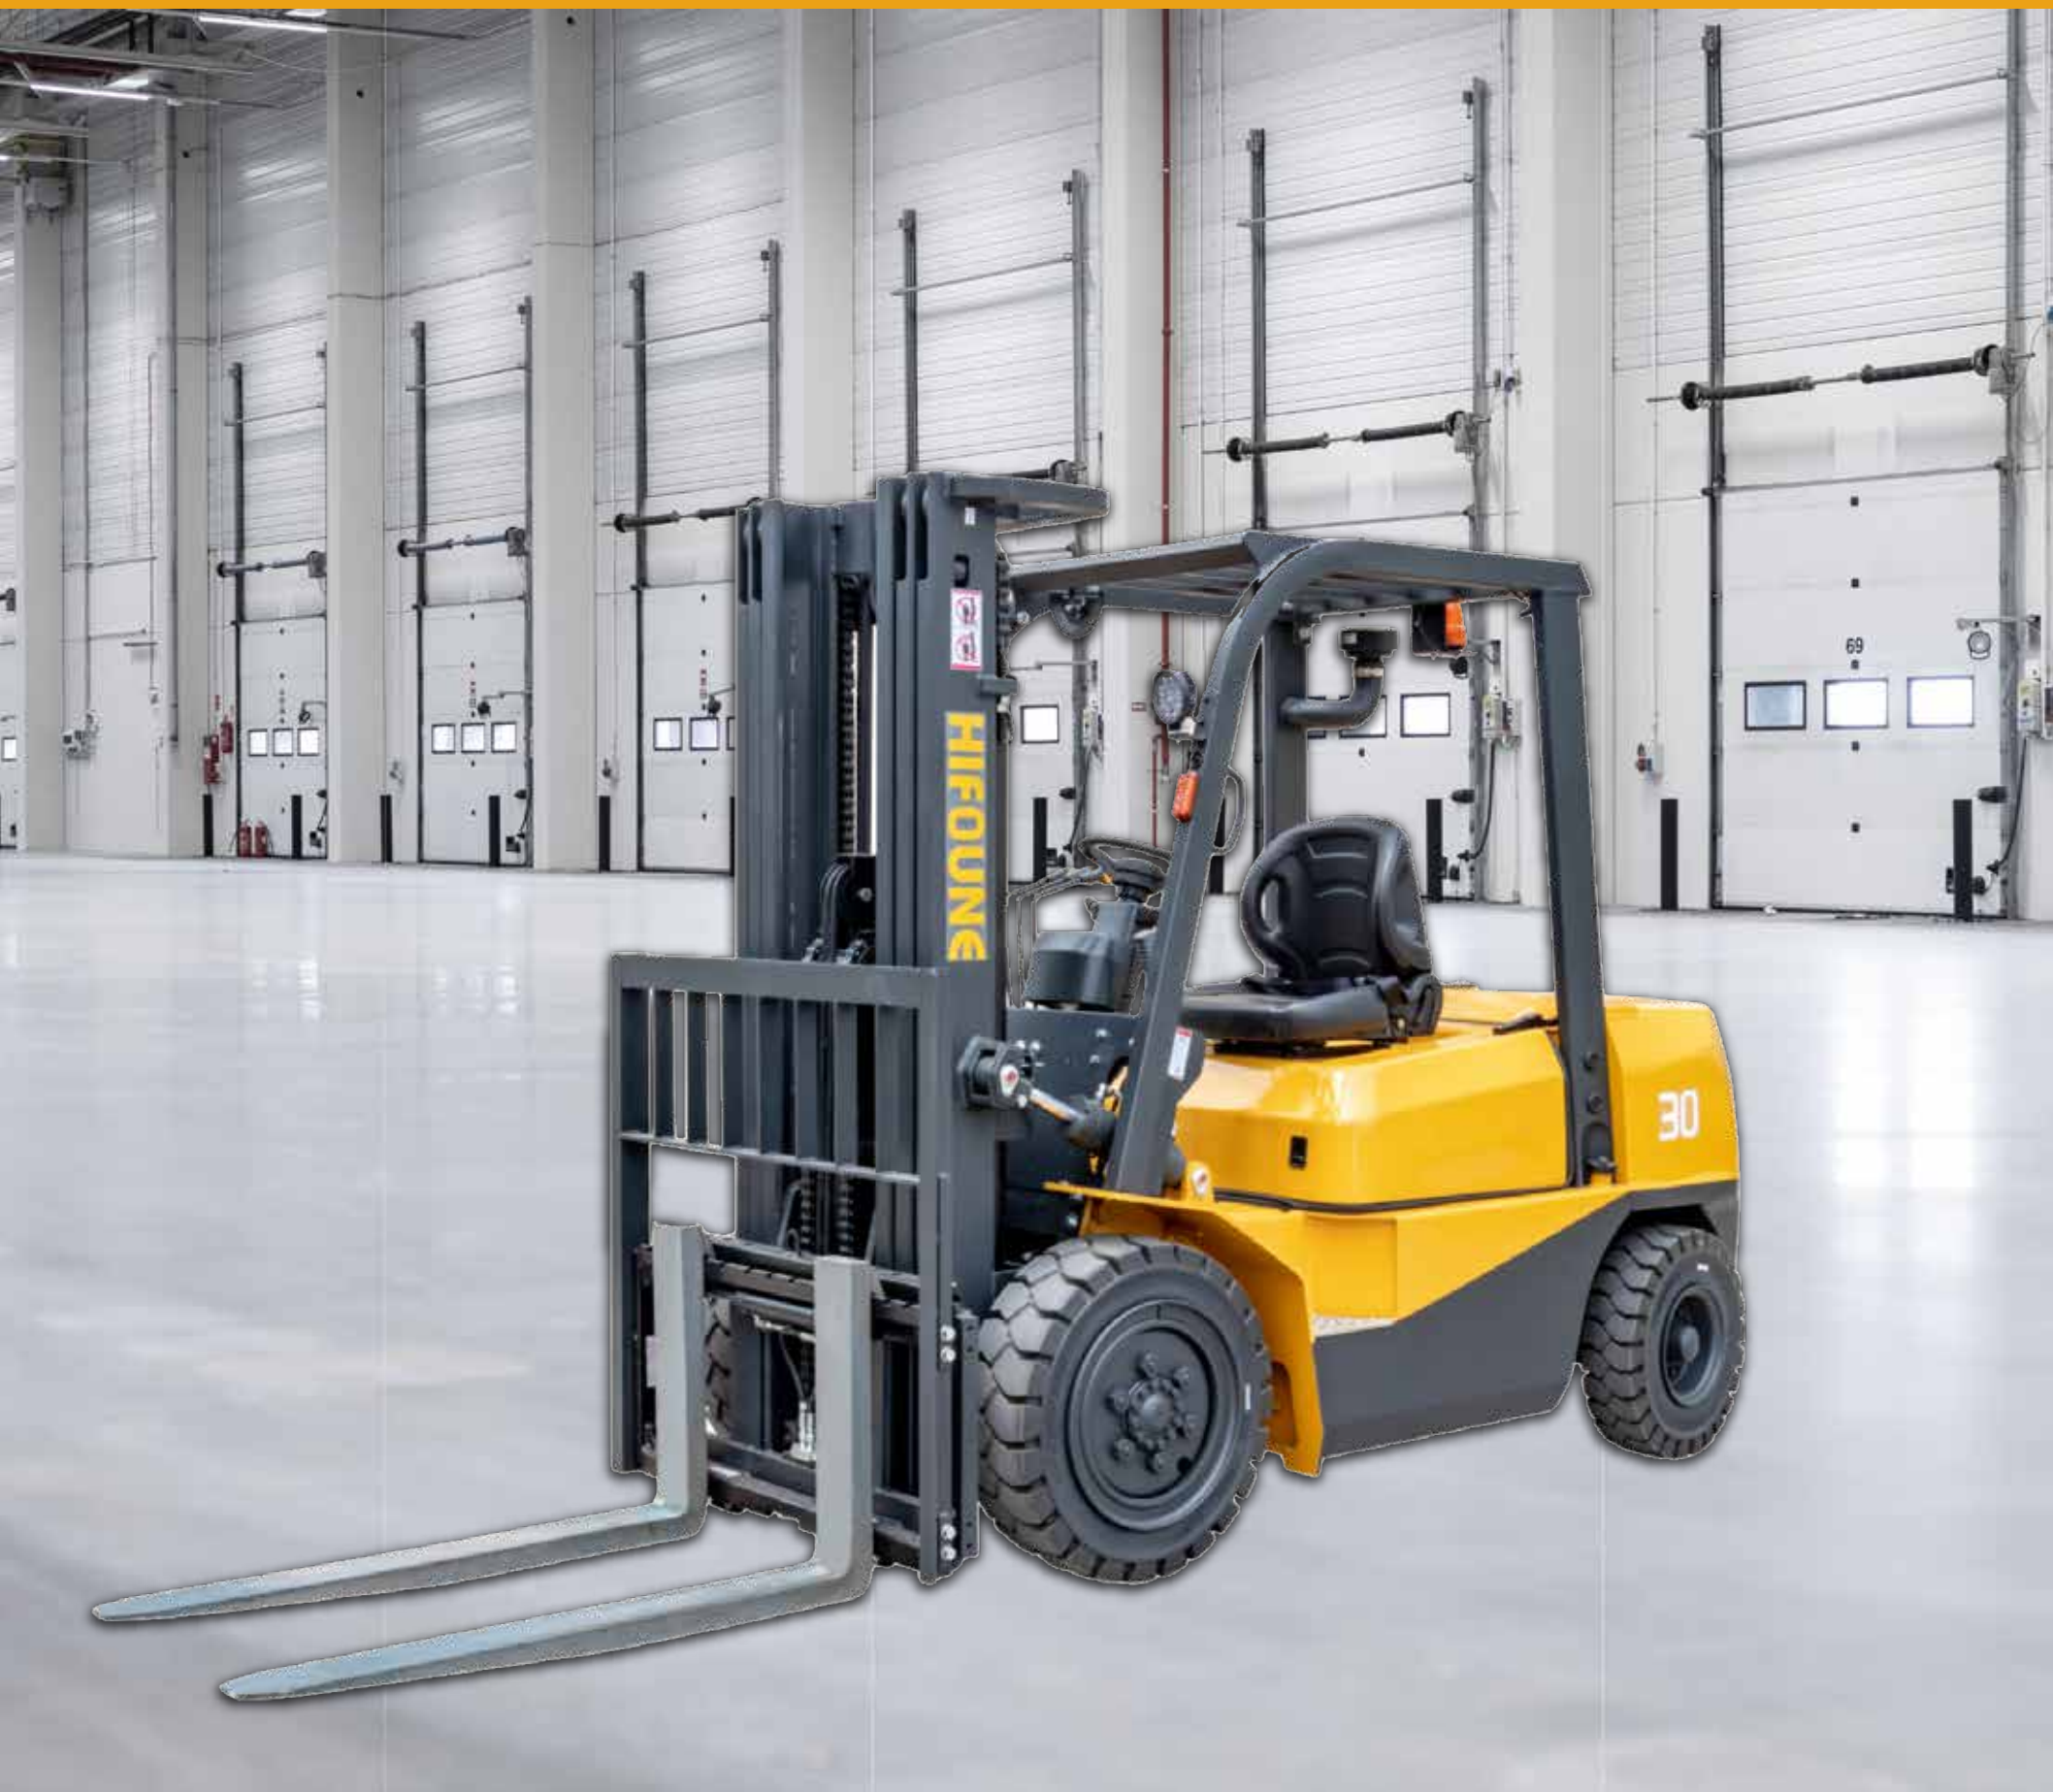

A SERIES COMBUSTION FORKLIFT

FD 30T

Specification

Model			FD30T
Specifications	-	Power Unit	Diesel
	-	Operator Type	Driver/Seat
	-	Transmission Box Type	Automatic Transmission
	kg	Rated Capacity	3000
	mm	Load Center	500
	mm	Max Lifting Height	3000
	-	Tire Type	Pneumatic Tire
	-	Front Tire Number	2
	-	Rear Tire Number	2
	-	Front Tire Size	28x9-15-14PR
Performance	-	Rear Tire Size	6.5-10-10PR
	mm/s	Lifting Speed (Loaded)	480
	mm/s	Lifting Speed (Unloaded)	500
	mm/s	Lowering Speed (Loaded)	420
	mm/s	Lowering Speed (Unloaded)	400
	km/h	Travelling Speed (Loaded)	20
	km/h	Travelling Speed (Unloaded)	21
	%	Max Grade-ability (Loaded)	20
	kN	Max Drawbar Pull (Loaded)	17
	deg	Mast Tilting Angle (Fwd/Bwd)	6/12
Dimensions	mm	Free Lifting Height	150
	mm	Turning Radius	2395
	mm	Overall Length (with fork)	3800
	mm	Overall Width	1240
	mm	Overhead Guard Height	2145
	mm	Fork Size (LxWxT)	1220x125x45
	mm	Mast Height (Fork Lowered)	2140
	V/Ah	Battery (Voltage/Capacity)	12/90
	kg	Truck Weight	4250
	L	Fuel Tank Capacity	70
Engine	-	Brand	XINCHAI
	-	Model	C490
	kw/rpm	Rated Power	40/2650
	n-m/rpm	Rated Torque	160/1600-2000
	-	Number of Cylinder	4
	-	Displacement	2.67

The standard model data would vary according to the configuration.

