

# 4017 RS

## TELEHANDLER



**JLG**  
reachingout™

### Performance

|                                       |                 |
|---------------------------------------|-----------------|
| Rated Capacity                        | 4000 kg         |
| Maximum Lift Height                   | 17.1 m          |
| Load at Max Height                    | 2500 kg         |
| Load at max. reach (stabilizers down) | 500 kg          |
| Frame Leveling                        | 10°             |
| Lift Speed (boom retracted)           |                 |
| Up                                    | 18.0 sec        |
| Down                                  | 15.0 sec        |
| Boom Speed                            |                 |
| Extended                              | 26 sec          |
| Retracted                             | 22 sec          |
| Top Travel Speed                      | 25.0 km/h       |
| Max. crowd                            | 3.5 sec         |
| Max. dump                             | 2.5 sec         |
| Engine                                | 74.4 kW 3 speed |
| Break out force                       | 5 kN            |
| Outside Turning Radius (over tires)   | 3.85 m          |
| Operating Weight                      | 11500 kg        |

### Standard Specifications

#### Engine

|                             |                  |
|-----------------------------|------------------|
| Make and Model              | Deutz TCD 3.6 L4 |
| No. of Cylinders            | 4                |
| Displacement                | 3.6 L            |
| Standard engine gross power | 74.4 kW/100hp    |
| Maximum torque at 1600 RPM  | 420Nm            |
| Fuel Tank Capacity          | 150 L            |

#### Transmission

- 3 speed forward and reverse (1st: 5 km/h, 2nd: 12 km/h, 3rd: 25 km/h)

#### Axles

- Trunnion mounted planetary steer axles
- Integral steer cylinder
- High bias limited slip differential on front axle

#### Brakes

- Service brakes inboard wet disc brakes on front and rear axle
- Service brakes servo assisted
- Hydraulic parking brake

#### Tires

|            |                                                          |
|------------|----------------------------------------------------------|
| • Standard | Mitas 14.00-24 TG02                                      |
| • Optional | Firestone 400/75-28<br>Goodyear 14.00-24 SGG foam-filled |

#### Cab

- EROPS and FOPS fully glazed all weather cab
- 2 way adjustable mechanical suspension seat

#### Steering 4-Wheel

- Power steering with steering wheel spinner
- Two wheel/four wheel/crab steer with push button select facility

#### Instruments

- Maintenance indicator
- Water temperature gauge
- Fuel gauge
- Right-hand tilt and sway lever
- Hourmeter
- Boom lift and crowd on single joystick
- Engine oil pressure gauge

#### Hydraulic System-Implement

|                                                     |       |
|-----------------------------------------------------|-------|
| Capacity                                            | 100 L |
| • Pump type: Gear pump                              |       |
| • Maximum gear pump flow 100 L/min                  |       |
| • Auxiliary hydraulic flow - intermittent 100 L/min |       |

### Accessories & Options

- Air conditioning (optional)
- Frame leveling
- Stabilizers
- Work lights (cab only)
- Road lights
- Rotating Beacon (optional)
- Load stability indicator (LSI)
- Rear retrieval hitch (optional)
- Brick guards (optional)

### Attachments

|                                |                          |
|--------------------------------|--------------------------|
| Standard:                      |                          |
| Standard carriage              | 4000 kg                  |
| Standard coupler               | Mechanical coupler       |
| Pallet fork (4000 kg)          | 1200 mm x 60 mm x 100 mm |
| Multi-Purpose Bucket With Grab | 2.4 m wide               |
| 4-1 Bucket                     | 2.4 m, 1.0 m³            |
| Light Material Bucket          | 2.45 m, 1.8 m³           |
| Lifting Hook                   | 4000 kg                  |
| Truss Boom                     | 3.4 m, 1000 kg           |


# 4017 RS

TELEHANDLER





## Dimensions

All dimensions are approximate.

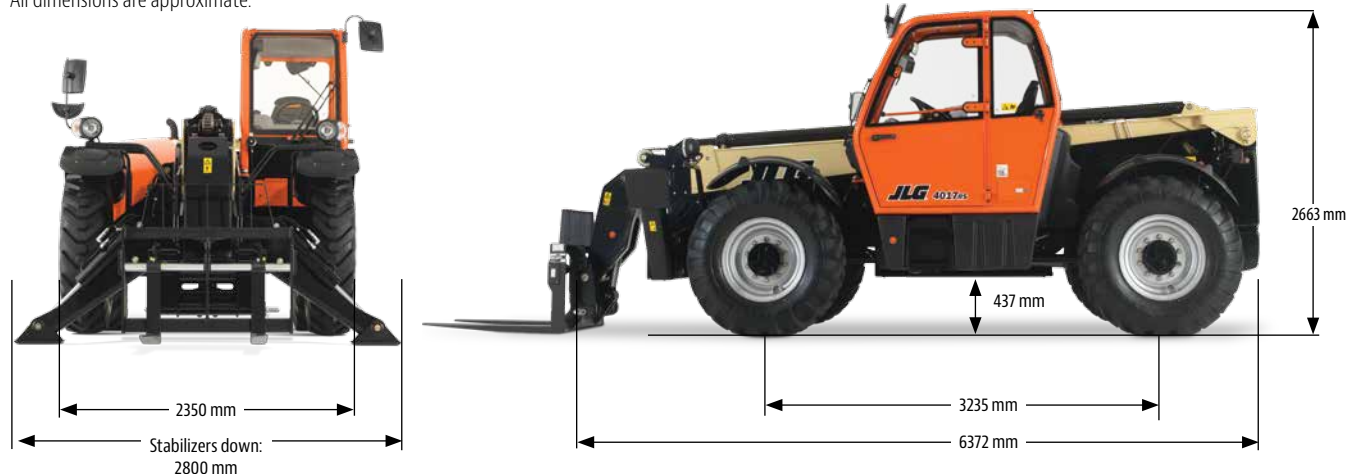

## Reach Dimensions

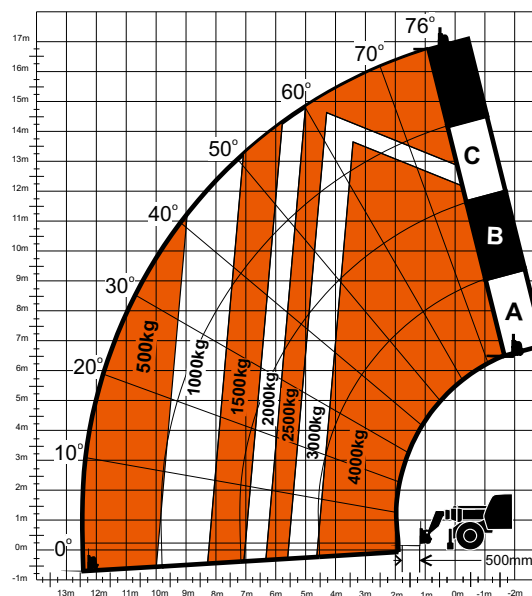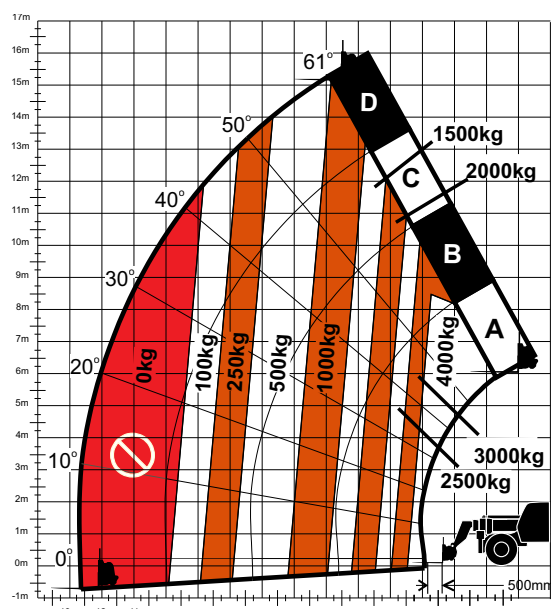

## The JLG "1 & 5" Warranty

JLG Industries, Inc. backs its products with its exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable OSHA Regulations in 29 CFR 1910.67, 29 CFR 1926.453, ANSI A92.5-2006, and CSA Standard CAN3-B354.2-M82, as originally manufactured for intended applications.

Part No.: 3132601  
Printed in USA



### JLG Industries, Inc.

1 JLG Drive  
McConnellsburg, PA 17233-9533  
Telephone 717-485-5161  
Toll-free in US 877-JLG-LIFT  
Fax 717-485-6417  
[www.jlg.com](http://www.jlg.com)

An Oshkosh Corporation Company