KV12-A

MINI EXCAVATOR

PRODUCT INFORMATION

Certification:

ISO CE EPA EURO5

Bucket Capacity	0.025m³
Chassis Width	930mm
Track Length	1250mm
Gradeability	40°
Chassis Ground Clearance	385mm
Track Width	180mm
Volume of fuel tank	3.5L
Overall Dimension	2200*930*2200mm
Transport Length	2200mm
Excavator Height	2200mm
Hydraulic flow	40L/Min
Hydraulic tank capacity	16L
Working pressure	16Mpa

Engine	KOOP 192F Diesel Engine (Euro 5)
Engine Power	7.0kw
EPA Engine Optional	Briggs&Stratton gasoline /13.5hp
Max.Digging Height	2550mm
Max.Dumping Height	1850mm
Max.Digging Depth	1650mm
Max.Digging Radius	2400mm
Turning Radius	1190mm
Bucket excavating force	11KN
Operating Weight	1000kg
Configuration	Valve:Beifang Brand
	Pump:Xingzou Brand
	Double Gear Pump

PRODUCT DETAIL

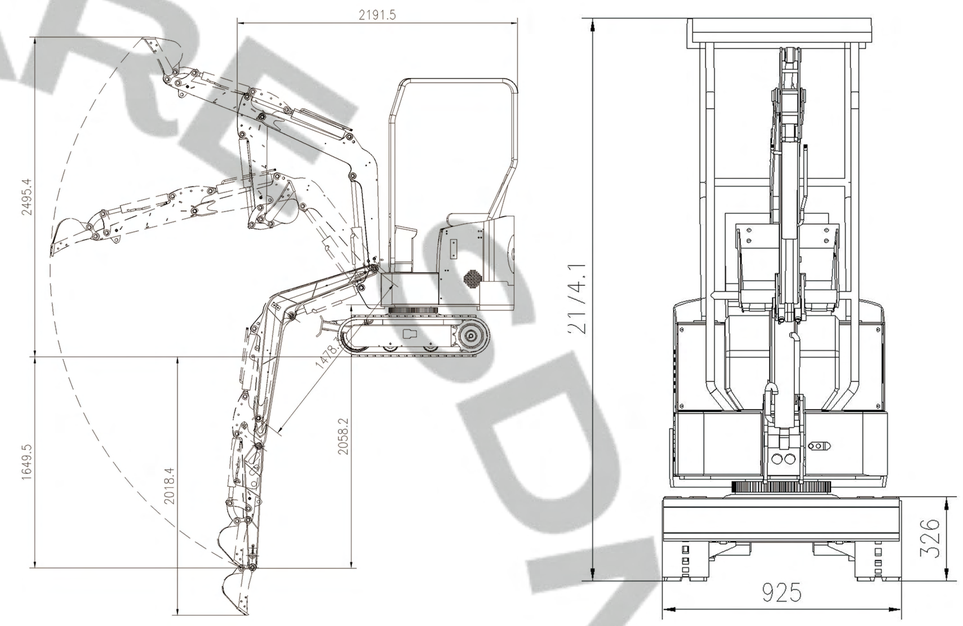

1



Dual pumps load sensitive,soft and powerful in action, faster travel speed,low engine temperature,energy and oil saving

2

Self-contained counterweight, increase the weight of the body and improve the stability of the vehicle

3

The pin comes with grease fitting,more lubricating

4

The bulldozer blade is widened and thickened,durable

5

Timer and voltmeter

6

Hammer cut-off valve,durable and wear-resistant cast steel material,good mechanical perfor-mance,prevent oil dripping and leakage

MR K HARDWARE SDN BHD