


Specifications

Models	GTJZ0608S	
Dimensions	Metric	US
A Platform height max.	5.8 m	19.02 ft
Working height max.*	7.8 m	25.59 ft
B Horizontal reach max.	0.9 m	3 ft
C Length - stowed	1.78 m	5.38 ft
Width - stowed	0.76 m	2.49 ft
D Height - stowed	2.11 m	6.88 ft
E Wheelbase	1.315 m	4.31 ft
Ground clearance	0.07 m	2.75 in
Platform size(L*W*H)	1.64 m* 0.76 m* 1.1 m	5.387 ft*2.49 ft*3.6 ft
Productivity		
Max. platform occupancy	2	2
Lift capacity	230 kg	507 lbs
Drive speed - stowed	0~4 km/h	0~2.48 mph
Drive speed - raised	0~0.8 km/h	0~0.49 mph
Gradeability**	25%	25%
Turning radius - inside	0.04 m	0.131 ft
Turning radius - outside	1.49 m	4.88 ft
Controls	Proportional	Proportional
Drives	Dual front wheel	Dual front wheel
Brakes	Dual rear wheel	Dual rear wheel
Tire size(solid non-marking)	305 mm * 115 mm	12 in * 5 in
Power		
Power Source	Battery	Battery
Driving Type	Electric	Electric
Battery specification	225 Ah, 6Vx4	225 Ah, 6Vx4
Weight***		
Indoor	1328 kg	2927 lbs
Standards Compliance	CE/ ISO/ ADR/ ARAMCO	CE/ ISO/ ADR/ ARAMCO

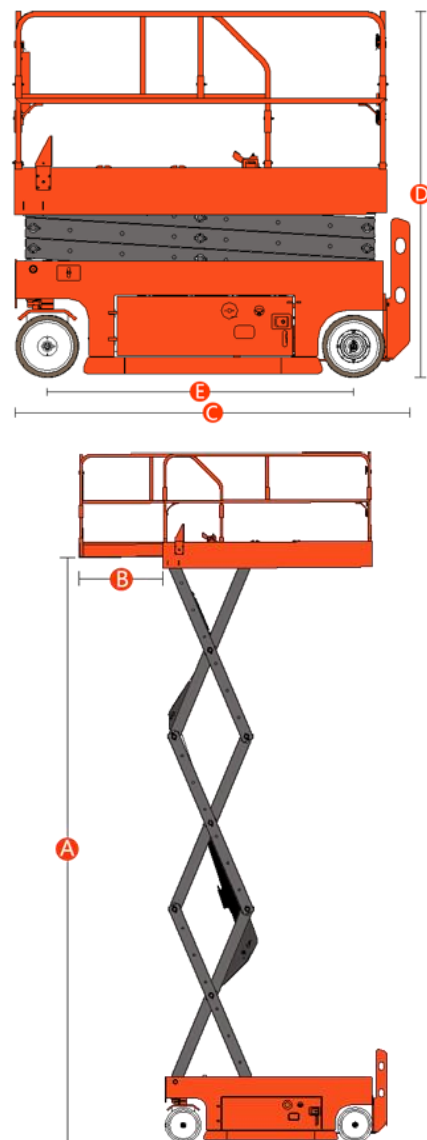

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gradeability applies to driving on slopes.

*** Weight will vary depending on options and/or country standards.

Hunan Sinoboom Heavy Industry Co., Ltd.

Address: No.128, East Jinzhou Avenue, Ningxiang High-tech industrial park,
Changsha, Hunan, China

Tel: +0086-731-87116222 Email: sales@sinoboom.com

Website: www.sinoboom.com