
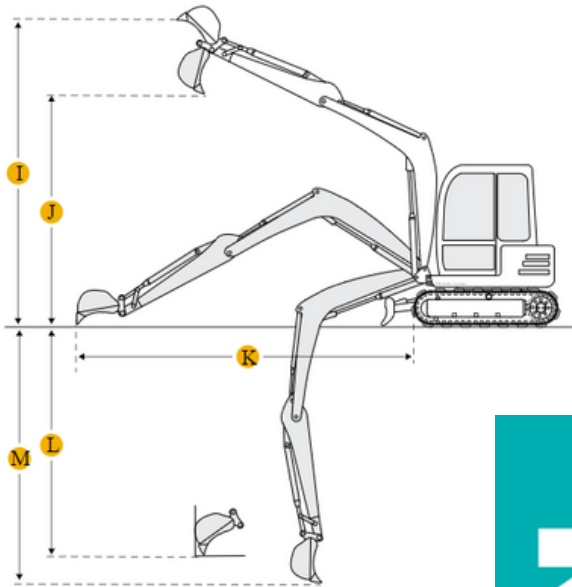


Kobelco 13SR Mini Excavator

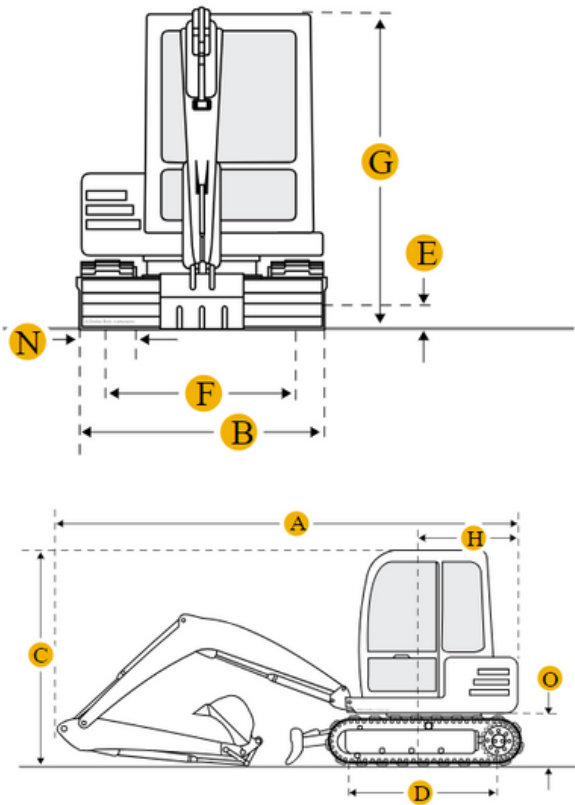

Boom/Stick Option (Hex) 1

A	Shipping Length Of Unit	3340 mm
I	Max Cutting Height	3630 mm
C	Shipping Height Of Unit	2500 mm
J	Max Loading Height	2560 mm
K	Max Reach Along Ground	3680 mm
L	Max Vertical Wall Digging Depth	1750 mm
M	Max Digging Depth	2110 mm

Boom/Stick Option (Hex) 1

Stick 3\4" (1020mm)

Dimensions

B	Width To Outside Of Tracks	890 mm
D	Length Of Track On Ground	1210 mm
E	Ground Clearance	180 mm
G	Height To Top Of Cab	2500 mm
H	Tail Swing Radius	580 mm

Removal Counterweight Clearance

430 mm

Undercarriage

N Shoe Size	230 mm
F Track Gauge	660 mm
Drawbar Pull	18.51 kN
Ground Pressure	22.14 kPa
Max Travel Speed	3.71 km/h

Engine

Number Of Cylinders	3
Engine Make	2348
Engine Model	3TNE68-YB
Net Power	8.9 kw
Power Measured @	2000 rpm
Displacement	0.8 L

Operational

Operating Weight	1469.7 kg
Fuel Capacity	15.2 L
Hydraulic System Fluid Capacity	17 L
Operating Voltage	12 V
Alternator Supplied Amperage	20 amps
Hydraulic System Relief Valve Pressure	20601.6 kPa
Hydraulic Pump Flow Capacity	35.6 L/min

Swing Mechanism

Swing Speed	10.7 rpm
-------------	----------

Buckets

Reference Bucket Capacity	0.1 m3
Minimum Bucket Capacity	0.1 m3
Maximum Bucket Capacity	0.1 m3

KOBELCO