




NPD series designed for applications that typically discharge 60% to 70% or more of the battery capacity. The battery is typically feature thick plates with high density active material. The thick battery plates allow for reserve energy to be stored deep within the battery plates and released during slow discharging such as trolling or solar applications. The high density material remains within the batteries' plate/grid structure longer, resisting the normal degradation found in cycling conditions. The battery is typically used for great extent discharge and recharged. The battery uses a different chemistry for the plates' active paste material and a slightly stronger acid. This chemistry allows for a much longer life in deep cycle applications with only a slightly reduction in maximum power output.

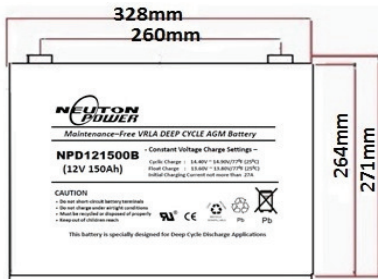

Performance Characteristics		
General Information	Length	328 mm
	Width	182 mm
	Height	264 mm
	Total Height	271 mm
	Approx Weight	43.0 kg ± 3%
	Nominal Voltage	12 Volt
	Number of Cells	6
	Nominal Capacity (20 hour rate)	150 Ah
	Terminal	M8
	Casing Material	Standard
Optional - UL94 V0, Flame Retardant		ABS
Nominal Capacity 77°F (25°C)	20 hour rate @ 1.80V (7.5A)	150 Ah
	10 hour rate @ 1.80V (13.5A)	135 Ah
	5 hour rate @ 1.70V (24.5A)	122.5 Ah
Internal Resistance	Fully Charged Battery 77°F (25°C) ≤ 3.8 mΩ	
Max. Discharge current in 5 sec	1500 A	
Capacity affected by Temperature	104°F (40°C) @ 20 hour rate	102%
	77°F (25°C) @ 20 hour rate	100%
	32°F (0°C) @ 20 hour rate	85%
	5°F (-15°C) @ 20 hour rate	65%
Reserve capacity to 10.5V at 27°C (the number of minutes a battery at 25A or 75A)	@ 25Amps	285 mins
	@ 75Amps	82 mins
Constant voltage charging @ 77°F (25°C)	Initial charging current	≤ 30.0 A
	Boost charging voltage	14.4V to 14.9V
	Float charging voltage	13.6V to 13.8V

Constant Current Discharge Data (Amperes at 25°C)											
End Point Volts/Cell	10min	15min	30min	45min	1hr	2hr	3hr	5hr	8hr	10hr	20hr
1.60V	226	193	122	90.7	83.3	52.8	37.1	25.2	16.6	14.8	8.25
1.65V	222	189	120	89.1	81.8	51.9	36.4	24.7	16.3	14.5	8.10
1.70V	218	186	118	87.4	80.3	50.9	35.7	24.3	16.0	14.3	7.95
1.75V	214	182	116	85.8	78.7	50.0	35.1	23.8	15.7	14.0	7.80
1.80V	206	175	111	82.5	75.7	48.0	33.7	22.9	15.1	13.5	7.50

Constant Power Discharge Data (Watts per cell at 25°C)											
End Point Volts/Cell	10min	15min	30min	45min	1hr	2hr	3hr	5hr	8hr	10hr	20hr
1.60V	436	371	236	174	160	101.0	71.4	48.5	32.0	28.5	15.8
1.65V	428	364	232	171	157	99.9	70.1	47.7	31.5	28.0	15.5
1.70V	420	358	228	168	154	98.0	68.8	46.8	30.9	27.5	15.3
1.75V	412	351	223	165	151	96.2	67.5	45.9	30.3	27.0	15.0
1.80V	397	337	215	158	145	92.5	64.9	44.1	29.1	25.9	14.4

Above data provided from tested samples is generally for descriptive only. It is not intent to make or imply any representation; guarantee or warranty with respect to any battery cell. Battery cell designs/specifications are subject to modify without prior notice.