


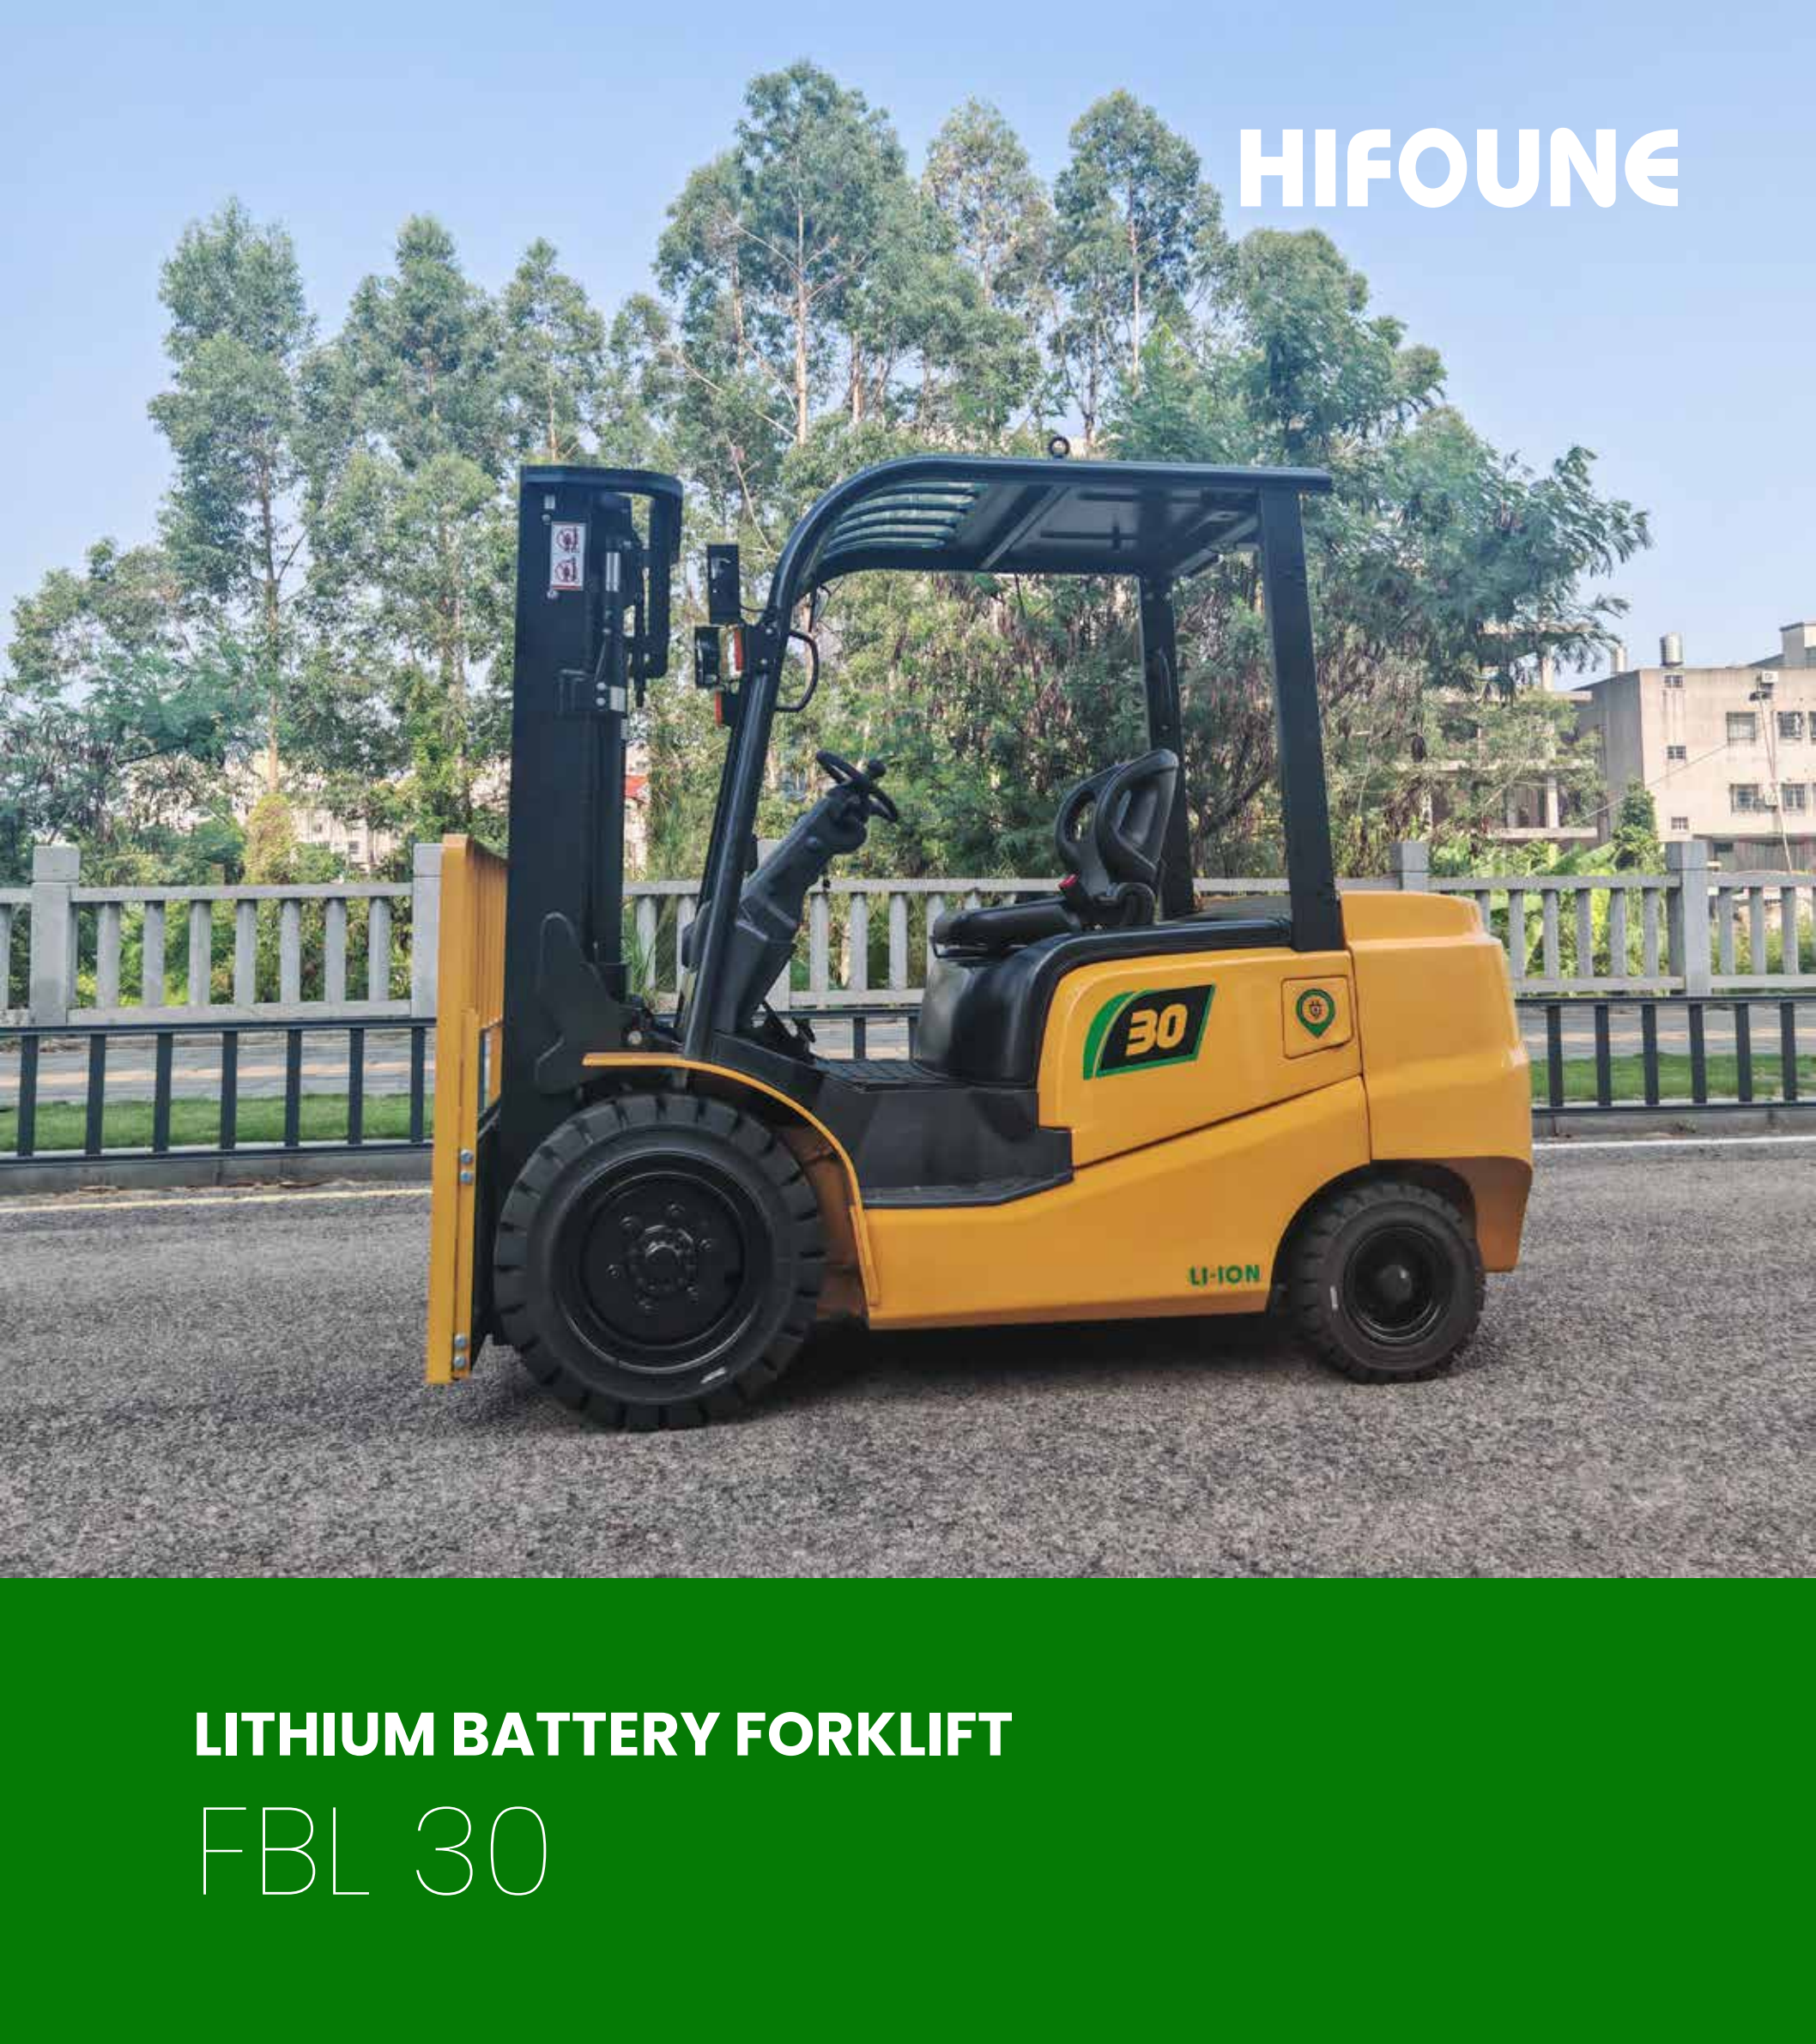

HIFOUNE

LITHIUM BATTERY FORKLIFT
FBL 30

Specification

Model		FBL30	
Character	-	Power Mode	Lithium Iron Phosphate Battery
	-	Driving Mode	Seat
	Kg	Load Capacity	3000
	mm	Load Center	500
Weight	mm	Max. Lifting Height	3000
	Kg	Self-Weight	4100
	Kg	Battery Weight	180
	mm	Front Overhang	475
Size	mm	Wheelbase	1650
	Deg	Mast Tilting Angle (Fwd/Bwd)	6/12
	mm	Mast Height (Fork Lowered)	2140
	mm	Free Lifting Height	145
	mm	Max. Lifting Height	4135
	mm	Overhead Guard Height	2150
	mm	Driver's Seat Height	1110
	mm	Overall Length (Without Fork)	2540
	mm	Overall Width	1220
	mm	Fork Size: Thickness*Width*Length	1220x125x45
	mm	Min. Ground Clearance (Mast)	140
	mm	Min. Ground Clearance (Middle of Chassis)	150
Tires	mm	Min. Turning Radius	2350
	-	Tire Tyre	Pneumatic
	-	Tire Number (X=Driving Tire)	2x/2
	-	Front Tire	28x9-15-14PR
Performance	-	Rear Tire	18x7-8-14PR
	Km/h	Travelling Speed (Loaded/Unloaded)	15/15
	mm/s	Lifting Speed (Loaded/Unloaded)	320/460
	kN	Max. Drawbar Pull (Loaded/Unloaded)	20/19.5
System	%	Max. Gradeability (Loaded/Unloaded)	15/15
	-	Power Unit Model	35M1
	-	Power Unit Cooling Form	Air Cooling
	KW	Travelling Motor Power	25.0AC
	KW	Working Motor Power	25.0AC
	V/Ah	Battery (Voltage/Capacity)	80/280
	V/A	Standard Charger Specifications (Output)	80/150

The standard model data would vary according to the configuration.

