



XG0807HD/XG0807HDW / Parameter

Item	Item	XG0807HD	XG0807HDW
Max. Working height	m	7.8	7.8
Max. Platform height	m	5.8	5.8
Load capacity	kg	230	230
Load capacity of extended platform	kg	115	115
Max. Occupant Capacity		2	2
Min. ground clearance (pit protector rising/descending)	mm	70/20	70/20
Min. Turning radius (inner/outer wheel)	m	0/1.75	0/1.75
Lifting motor	kW	3.3	3.3
Lifting/Descending duration of platform	s	13-30/25-35	13-30/25-35
Max. Traveling speed at low level	km/h	3.9	3.9
Max. Traveling speed at high level	km/h	0.8	0.8
Max. gradeability	%	25	25
Max. Inclination (side/forward and backward)	°	1.5/3	1.5/3
Battery	v/Ah	4 × 6/225	4 × 6/225
Charger	v/A	24/30	24/30
Tire specification	—	323 × 100	323 × 100
Total machine weight	kg	1550	1580
a Overall length(no ladder)	mm	1900(1680)	1900(1680)
b Overall width	mm	760	810
c Overall height (platform folded)	mm	2160(1830)	2160(1830)
d × e Working platform dimension (Length × Width)	mm	1670 × 740	1670 × 740
Length of extension platform	mm	900	900
f Wheelbase	mm	1360	1360

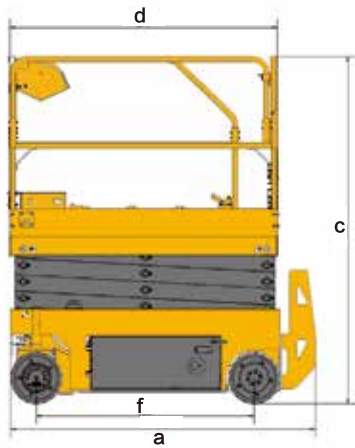



XG1008HD/XG1012HD / Parameter

Item	Item	XG1008HD	XG1012HD
Max. Working height	m	10	10
Max. Platform height	m	8	8
Load capacity	kg	230	450
Load capacity of extended platform	kg	115	115
Max. Occupant Capacity		2	2
Min. ground clearance (pit protector rising/descending)	mm	100/20	100/20
Min. Turning radius (inner/outer wheel)	m	0/2.3	0/2.3
Lifting motor	kW	3.3	3.3
Lifting/Descending duration of platform	s	29 ~ 40/34 ~ 45	29-40/34-45
Max. Traveling speed at low level	km/h	3.5	3.2
Max. Traveling speed at high level	km/h	0.8	0.8
Max. gradeability	%	25	25
Max. Inclination (side/forward and backward)	°	1.5/3	1.5/3
Battery	v/Ah	4 × 6/225	4 × 6/225
Charger	v/A	24/30	24/30
Tire specification	—	381 × 127	381 × 127
Total machine weight	kg	2150	2620
a Overall length(no ladder)	mm	2477 (2280)	2477 (2267)
b Overall width	mm	810	1170
c Overall height (platform folded)	mm	2335(2005)	2355 (1805)
d × e Working platform dimension (Length × Width)	mm	2270 × 810	2277 × 1120
Length of extension platform	mm	900	900
f Wheelbase	mm	1877	1877

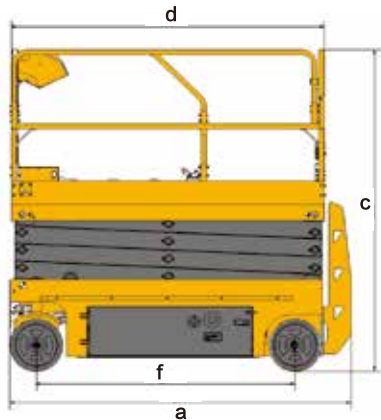


XG1212HD/XG1412HD/XG1612HDParameter

Item	Item	XG1212HD	XG1412HD	XG1612HD
Max. Working height	m	12	13.8	15.7
Max. Platform height	m	10	11.8	13.7
Load capacity	kg	320	320	230
Load capacity of extended platform	kg	115	115	115
Max. Occupant Capacity		2	2	2
Min. ground clearance (pit protector rising/descending)	mm	100/20	100/20	100/20
Min. Turning radius (inner/outer wheel)	m	0/2.3	0/2.3	0/2.65
Lifting motor	kW	4.5	4.5	4.5
Lifting/Descending duration of platform	s	50-75/43-65	45-70/52-78	65-82/61-80
Max. Traveling speed at low level	km/h	3.2	3.2	3.2
Max. Traveling speed at high level	km/h	0.8	0.8	0.8
Max. gradeability	%	25	25	25
Max. Inclination (side/forward and backward)	°	1.5/3	1.5/3	1.5/3
Battery	v/Ah	4 × 6/240	4 × 12/300	4 × 12/300
Charger	v/A	24/30	24/30	24/30
Tire specification	—	381 × 127	381 × 127	381 × 127
Total machine weight	kg	2900	3100	3350
a Overall length(no ladder)	mm	2477 (2267)	2480 (2270)	2840 (2630)
b Overall width	mm	1170	1190	1250
c Overall height (platform folded)	mm	2480 (1930)	2600 (2060)	2600(2060)
d × e Working platform dimension (Length × Width)	mm	2277 × 1120	2275 × 1120	2640 × 1120
Length of extension platform	mm	900	900	900
f Wheelbase	mm	1877	1877	2240

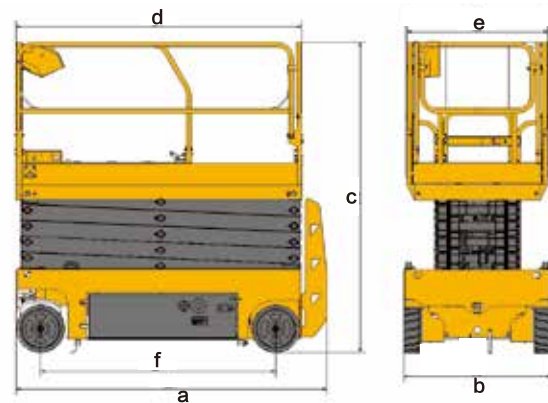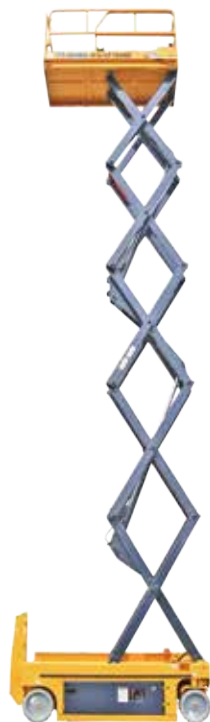

XG0607DCParameter


Item	Item	XG0607DC
Max. Working height	m	5.6
Max. Platform height	m	3.6
Load capacity	kg	230
Load capacity of extended platform	kg	90
Max. Occupant Capacity		2
Min. ground clearance (pit protector rising/descending)	mm	65/15
Min. Turning radius (inner/outer wheel)	m	0.4/1.55
Lifting motor	kW	1.3
Lifting/Descending duration of platform	s	27-37/23-33
Max. Traveling speed at low level	km/h	4
Max. Traveling speed at high level	km/h	0.5
Max. gradeability	%	25
Max. Inclination (side/forward and backward)	°	1.5/2.5
Battery	v/Ah	2 × 12/85
Charger	v/A	24/15
Tire specification	—	254 × 76
Total machine weight	kg	920
a Overall length(no ladder)	mm	1440(1290)
b Overall width	mm	760
c Overall height (platform folded)	mm	2020(1660)
d × e Working platform dimension (Length × Width)	mm	1290 × 700
Length of extension platform	mm	600
f Wheelbase	mm	1030

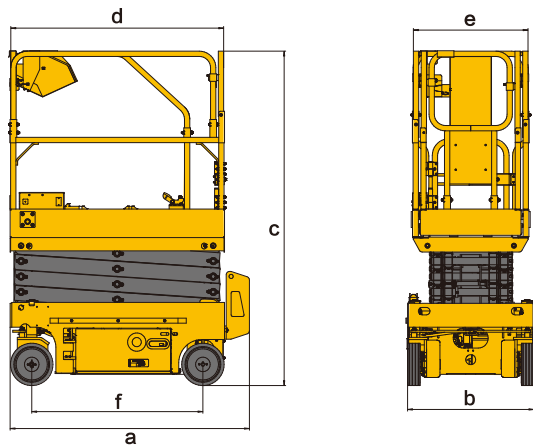

XG0807DC/XG0807DCW

Parameter


Item	Item	XG0807DC	XG0807DCW
Max. Working height	m	7.8	7.8
Max. Platform height	m	5.8	5.8
Load capacity	kg	230	230
Load capacity of extended platform	kg	115	115
Max. Occupant Capacity		2	2
Min. ground clearance (pit protector rising/descending)	mm	70/20	70/20
Min. Turning radius (inner/outer wheel)	m	0/1.75	0/1.75
Lifting motor	kW	3.3	3.3
Lifting/Descending duration of platform	s	13-30/25-35	13-30/25-35
Max. Traveling speed at low level	km/h	4.5	4.5
Max. Traveling speed at high level	km/h	0.8	0.8
Max. gradeability	%	25	25
Max. Inclination (side/forward and backward)	°	1.5/3	1.5/3
Battery	v/Ah	4 × 6/225	4 × 6/225
Charger	v/A	24/30	24/30
Tire specification	—	323 × 100	323 × 100
Total machine weight	kg	1550	1580
a Overall length(no ladder)	mm	1900(1680)	1900(1680)
b Overall width	mm	760	810
c Overall height (platform folded)	mm	2160(1830)	2160(1830)
d × e Working platform dimension (Length × Width)	mm	1670 × 740	1670 × 740
Length of extension platform	mm	900	900
f Wheelbase	mm	1360	1360

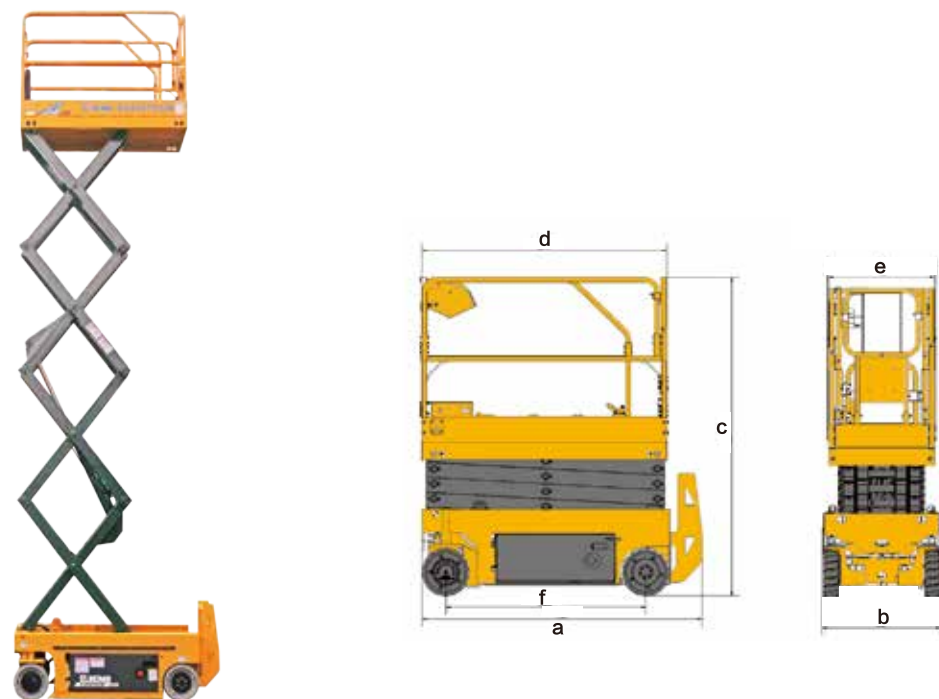

XG1008DC/XG1012DC

Parameter


Item	Item	XG1008DC	XG1012DC
Max. Working height	m	10	10
Max. Platform height	m	8	8
Load capacity	kg	230	450
Load capacity of extended platform	kg	115	115
Max. Occupant Capacity		2	2
Min. ground clearance (pit protector rising/descending)	mm	100/20	100/20
Min. Turning radius (inner/outer wheel)	m	0/2.3	0/2.3
Lifting motor	kW	3.3	3.3
Lifting/Descending duration of platform	s	29-40/34-45	29-40/34-45
Max. Traveling speed at low level	km/h	4	4
Max. Traveling speed at high level	km/h	0.8	0.8
Max. gradeability	%	25	25
Max. Inclination (side/forward and backward)	°	1.5/3	1.5/3
Battery	v/Ah	4 × 6/225	4 × 6/225
Charger	v/A	24/30	24/30
Tire specification	—	381 × 127	381 × 127
Total machine weight	kg	2150	2620
a Overall length(no ladder)	mm	2477(2280)	2477(2267)
b Overall width	mm	810	1170
c Overall height (platform folded)	mm	2335(2005)	2355(1805)
d × e Working platform dimension (Length × Width)	mm	2270 × 810	2277 × 1120
Length of extension platform	mm	900	900
f Wheelbase	mm	1877	1877

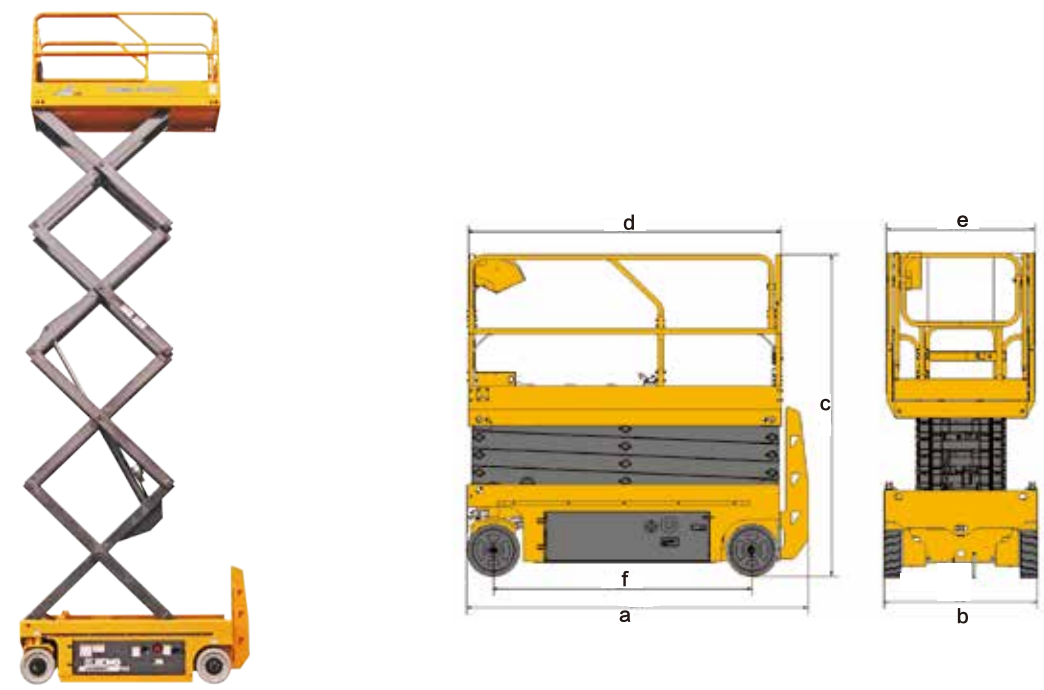

XG1212DC/XG1412DC

Parameter

Item	Item	XG1212DC	XG1412DC
Max. Working height	m	12	13.8
Max. Platform height	m	10	11.8
Load capacity	kg	320	320
Load capacity of extended platform	kg	115	115
Max. Occupant Capacity		2	2
Min. ground clearance (pit protector rising/descending)	mm	100/20	100/20
Min. Turning radius (inner/outer wheel)	m	0/2.3	0/2.3
Lifting motor	kW	4.5	4.5
Lifting/Descending duration of platform	s	50-75/43-65	45-70/52-78
Max. Traveling speed at low level	km/h	4	4
Max. Traveling speed at high level	km/h	0.8	0.8
Max. gradeability	%	25	25
Max. Inclination (side/forward and backward)	°	1.5/3	1.5/3
Battery	v/Ah	4 × 6/240	4 × 12/300
Charger	v/A	24/30	24/30
Tire specification	—	381 × 127	381 × 127
Total machine weight	kg	2900	3100
a Overall length(no ladder)	mm	2477(2267)	2480(2270)
b Overall width	mm	1170	1190
c Overall height (platform folded)	mm	2480(1930)	2600(2060)
d × e Working platform dimension (Length × Width)	mm	2277 × 1120	2275 × 1120
Length of extension platform	mm	900	900
f Wheelbase	mm	1877	1877

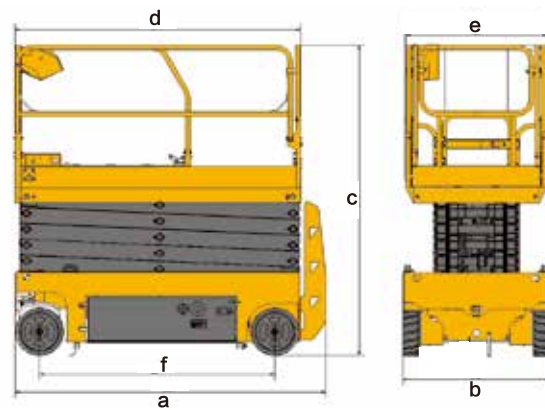

XG1612DC

Parameter

Item	Item	XG1612DC
Max. Working height	m	15.7
Max. Platform height	m	13.7
Load capacity	kg	230
Load capacity of extended platform	kg	115
Max. Occupant Capacity		2
Min. ground clearance (pit protector rising/descending)	mm	100/20
Min. Turning radius (inner/outer wheel)	m	0/2.65
Lifting motor	kW	4.5
Lifting/Descending duration of platform	s	65-82/61-80
Max. Traveling speed at low level	km/h	4
Max. Traveling speed at high level	km/h	0.8
Max. gradeability	%	25
Max. Inclination (side/forward and backward)	°	1.5/3
Battery	v/Ah	4 × 12/300
Charger	v/A	24/30
Tire specification	—	381 × 127
Total machine weight	kg	3350
a Overall length(no ladder)	mm	2840(2630)
b Overall width	mm	1250
c Overall height (platform folded)	mm	2600(2060)
d × e Working platform dimension (Length × Width)	mm	2640 × 1120
Length of extension platform	mm	900
f Wheelbase	mm	2240

