


Sumitomo SH200 Hydraulic Excavator

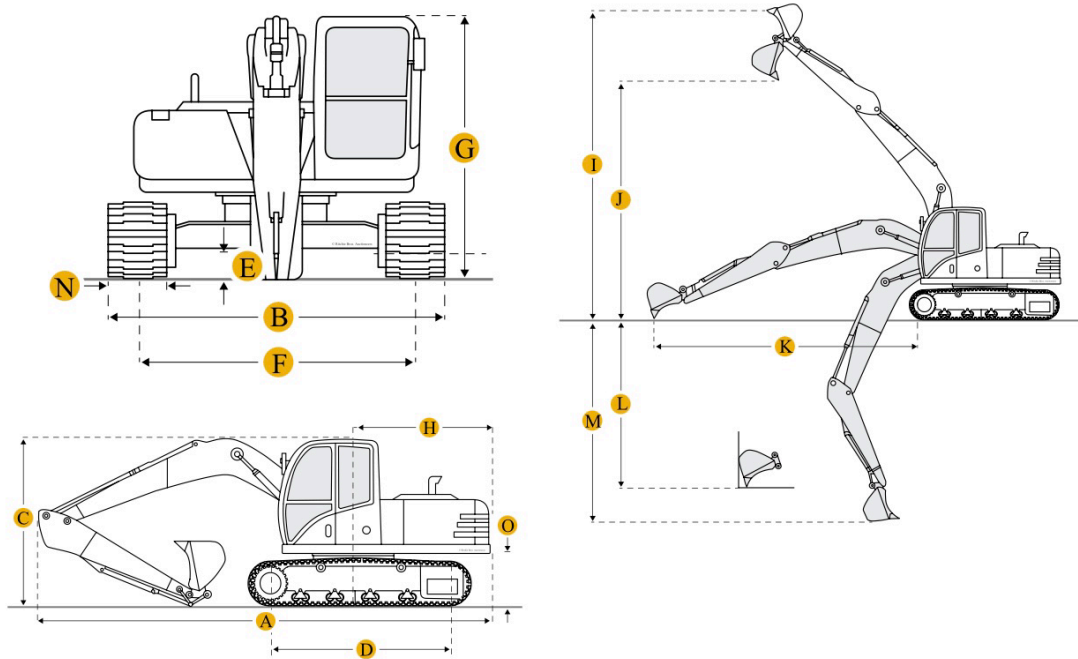

Units

Imperial

Metric

Dimensions

Boom/Stick Option (Hex) 1		
A	Shipping Length Of Unit	30.98 ft in
C	Shipping Height Of Unit	9.39 ft in
I	Max Cutting Height	30.39 ft in
J	Max Loading Height	21.2 ft in
K	Max Reach Along Ground	30.91 ft in
L	Max Vertical Wall Digging Depth	17.95 ft in
M	Max Digging Depth	20.02 ft in
Boom/Stick Option (Hex) 1		Boom / Stick 2400mm

Boom/Stick Option (Hex) 2

A	Shipping Length Of Unit	30.98 ft in
I	Max Cutting Height	31.07 ft in
C	Shipping Height Of Unit	9.39 ft in
J	Max Loading Height	21.89 ft in
K	Max Reach Along Ground	32.65 ft in
L	Max Vertical Wall Digging Depth	19.92 ft in
M	Max Digging Depth	21.95 ft in

Boom/Stick Option (Hex) 2

Boom / Stick 3000mm

Dimensions

E	Ground Clearance	1.51 ft in
G	Height To Top Of Cab	9.39 ft in
B	Width To Outside Of Tracks	9.19 ft in
D	Length Of Track On Ground	11.06 ft in
H	Tail Swing Radius	9.09 ft in

Removal Counterweight Clearance

3.42 ft in

Undercarriage

F	Track Gauge	7.22 ft in
N	Shoe Size	23.63 in
	Max Travel Speed	3.42 mph
	Ground Pressure	6.11 psi

Specifications

Engine

Engine Make	2353
Engine Model	6BD1T
Net Power	128 hp
Power Measured @	2020 rpm
Displacement	352.8 cu in

Operational

Operating Weight	41909.9 lb
Fuel Capacity	81.9 gal
Hydraulic System Fluid Capacity	58.2 gal
Hydraulic System Relief Valve Pressure	4550 psi

Swing Mechanism

Swing Speed	11.9 rpm
--------------------	----------

Buckets

Reference Bucket Capacity	1 yd3
Minimum Bucket Capacity	0.6 yd3
Maximum Bucket Capacity	1.4 yd3
