




**SUNWAY®**

**Sunflex Hose Fitting**

---

## **One-Piece Fitting**


SUNWAY

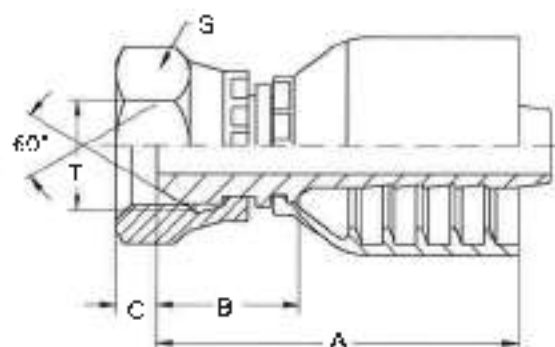

## SR001

BSPF FEMALE 60° CONE  
ISO 8434-6


| PART NO.    | THREAD T  | HOSE BORE |      | DIMENSIONS |      |    |
|-------------|-----------|-----------|------|------------|------|----|
|             |           | DN        | DASH | A          | B    | S  |
| SR001-04-04 | G1/4x19   | 6         | 04   | 41         | 18.5 | 19 |
| SR001-06-05 | G3/8x19   | 8         | 05   | 42         | 19.5 | 22 |
| SR001-06-06 | G3/8x10   | 10        | 06   | 46         | 20   | 22 |
| SR001-08-08 | G1/2x14   | 12        | 08   | 51         | 22.5 | 27 |
| SR001-10-10 | G5/8x14   | 16        | 10   | 58         | 25.3 | 30 |
| SR001-12-12 | G3/4x14   | 20        | 12   | 61         | 25   | 32 |
| SR001-16-16 | G1x11     | 25        | 16   | 70         | 27.8 | 41 |
| SR001-20-20 | G1-1/4x11 | 32        | 20   | 84         | 36   | 50 |
| SR001-24-24 | G1-1/2x11 | 40        | 24   | 92         | 35.5 | 55 |

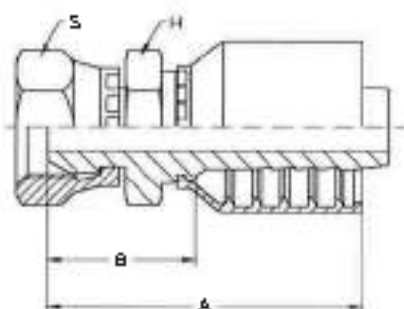

## SR001H

BSPP FEMALE 60° CONE  
ISO 8434-6


| PART NO.     | THREAD T  | HOSE BORE |      | TUBE O.D. | DIMENSIONS |      |    |    |
|--------------|-----------|-----------|------|-----------|------------|------|----|----|
|              |           | DN        | DASH |           | A          | B    | H  | S  |
| SR001-04-04H | G1/4x18   | 6         | 04   |           | 46         | 23.5 | 12 | 19 |
| SR001-06-06H | G3/8x18   | 10        | 06   |           | 50         | 24.5 | 17 | 22 |
| SR001-08-08H | G1/2x14   | 12        | 08   |           | 57         | 29   | 22 | 27 |
| SR001-10-08H | G1/2x14   | 12        | 08   |           | 60         | 29   | 22 | 30 |
| SR001-12-08H | G1/2x14   | 12        | 08   |           | 67         | 31.5 | 27 | 32 |
| SR001-12-12H | G3/4x14   | 20        | 12   |           | 69         | 33.5 | 27 | 32 |
| SR001-16-16H | G1x11     | 25        | 16   |           | 77.5       | 35.5 | 32 | 41 |
| SR001-20-20H | G1-1/4x11 | 32        | 20   |           | 88.5       | 42   | 41 | 50 |

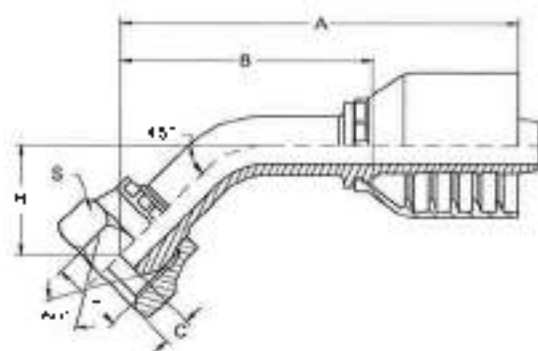

## SR060

45°METRIC FEMALE 60°CONE

| PART NO.    | THREAD T  | HOSE BORE |      | TUBE O.D. | DIMENSIONS |      |      |    |
|-------------|-----------|-----------|------|-----------|------------|------|------|----|
|             |           | DN        | DASH |           | A          | B    | H    | S  |
| SR060-04-04 | G1/4x19   | 6         | 04   |           | 66         | 43   | 20   | 19 |
| SR060-06-06 | G3/8x19   | 8         | 06   |           | 70         | 47.5 | 21   | 22 |
| SR060-06-06 | G3/8x19   | 10        | 06   |           | 78         | 52.5 | 23.5 | 22 |
| SR060-08-08 | G1/2x14   | 12        | 08   |           | 92         | 64   | 26   | 27 |
| SR060-10-10 | G5/8x14   | 16        | 10   |           | 98         | 67   | 30   | 30 |
| SR060-12-12 | G3/4x14   | 20        | 12   |           | 116        | 80   | 32   | 32 |
| SR060-1E-16 | G1x11     | 25        | 16   |           | 134        | 91.5 | 34   | 41 |
| SR060-20-20 | G1-1/4x11 | 32        | 20   |           | 157        | 109  | 42   | 50 |
| SR060-24-24 | G1-1/2x11 | 40        | 24   |           | 179        | 122  | 50   | 55 |

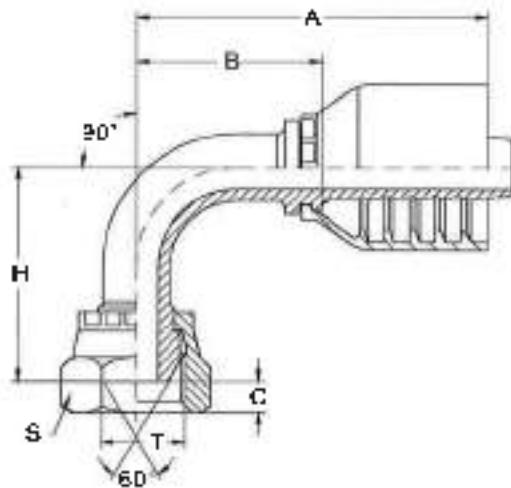


## SR051

90°BSPP FEMALE 60°CONE

| PART NO     | THREAD T  | HOSE BORE |      | DIMENSIONS |       |      |    |
|-------------|-----------|-----------|------|------------|-------|------|----|
|             |           | DN        | DASH | A          | B     | H    | S  |
| SR051-04-04 | G1/4x19   | 5         | 04   | 53         | 30    | 34   | 19 |
| SR051-06-05 | G3/8x19   | 8         | 05   | 55         | 32.5  | 41   | 22 |
| SR051-06-06 | G3/8x19   | 10        | 06   | 64         | 36    | 44   | 22 |
| SR051-08-08 | G1/2x14   | 12        | 08   | 76         | 48    | 53   | 27 |
| SR051-10-10 | G5/8x14   | 16        | 10   | 86         | 55    | 58   | 30 |
| SR051-12-12 | G3/4x14   | 20        | 12   | 98         | 62    | 63.5 | 32 |
| SR051-16-16 | G1x11     | 25        | 16   | 118        | 75.5  | 74   | 41 |
| SR051-20-20 | G1-1/4x11 | 32        | 20   | 142        | 94.5  | 92   | 50 |
| SR051-24-24 | G1-1/2x11 | 40        | 24   | 165        | 108.5 | 105  | 55 |

SUNWAY

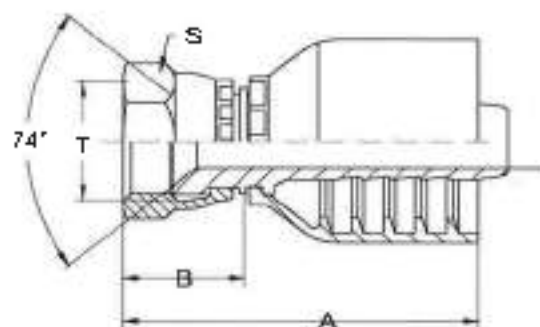


## SR005

JIC FEMALE 74° CONE SEAL  
ISO8434-2 - SAE J514

| PART NO.    | THREAD T  | HOSE BORE |      | DIMENSIONS |      |    |  |
|-------------|-----------|-----------|------|------------|------|----|--|
|             |           | DN        | DASH | A          | B    | S  |  |
| SR005-04-04 | 7/16x20   | 6         | 04   | 40         | 17.5 | 14 |  |
| SR005-05-05 | 1/2x20    | 8         | 05   | 40         | 17.5 | 17 |  |
| SR005-06-06 | 9/16x18   | 10        | 06   | 44         | 18.5 | 19 |  |
| SR005-08-08 | 3/4x16    | 12        | 08   | 51         | 22.5 | 22 |  |
| SR005-10-10 | 7/8x14    | 16        | 10   | 54         | 22.5 | 27 |  |
| SR005-12-12 | 1-1/16x12 | 20        | 12   | 59         | 23.8 | 32 |  |
| SR005-16-16 | 1-5/16x12 | 25        | 16   | 67         | 25.3 | 41 |  |
| SR005-20-20 | 1-5/8x12  | 32        | 20   | 78         | 30   | 50 |  |
| SR005-24-24 | 1-7/8x12  | 40        | 24   | 88         | 31   | 60 |  |


SUNWAY

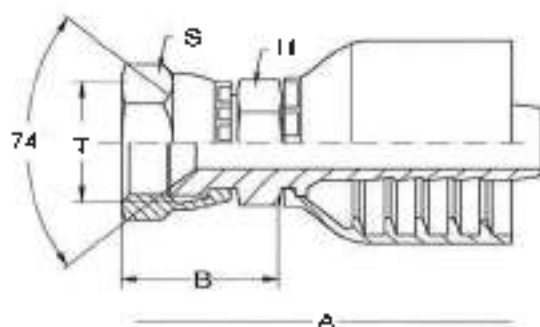

## SR005H

JIC FEMALE 74° CONE SEAL  
ISO8434-2--SAE J514


| PART NO      | THREAD T  | HOSE BORE |      | DIMENSIONS |      |    |    |
|--------------|-----------|-----------|------|------------|------|----|----|
|              |           | DN        | DASH | A          | B    | H  | S  |
| SR005-04-04H | 7/16x20   | 6         | 04   | 42         | 19.5 | 14 | 14 |
| SR005-05-05H | 1/2x20    | 8         | 05   | 44         | 21.5 | 14 | 17 |
| SR005-06-06H | 9/16x18   | 10        | 06   | 49         | 23   | 17 | 19 |
| SR005-08-08H | 3/4x16    | 12        | 08   | 55         | 26.5 | 19 | 22 |
| SR005-10-10H | 7/8x14    | 16        | 10   | 58         | 26.5 | 22 | 27 |
| SR005-12-12H | 1-1/16x12 | 20        | 12   | 65         | 29   | 27 | 32 |
| SR005-16-16H | 1-5/16x12 | 25        | 16   | 75         | 32.5 | 32 | 41 |
| SR005-20-20H | 1-5/8x12  | 32        | 20   | 82         | 34   | 46 | 50 |
| SR005-24-24H | 1-7/8x12  | 40        | 24   | 93         | 36   | 55 | 60 |

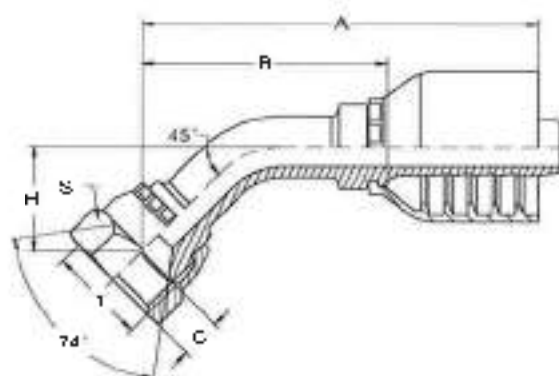

## SR064

45° JIC FEMALE 74° CONE SEAL  
SAE J514


| A S<br>PART NO | THREAD T  | HOSE BORE |      | DIMENSIONS |     |      |    |
|----------------|-----------|-----------|------|------------|-----|------|----|
|                |           | DN        | DASH | A          | B   | H    | S  |
| SR064-04-04    | 7/16x20   | 6         | 04   | 66         | 43  | 20   | 14 |
| SR064-05-05    | 1/2x20    | 8         | 05   | 89         | 46  | 20   | 17 |
| SR064-06-06    | 9/16x18   | 10        | 06   | 75         | 49  | 21   | 19 |
| SR064-08-08    | 3/4x16    | 12        | 08   | 92         | 64  | 26   | 22 |
| SR064-10-10    | 7/8x14    | 16        | 10   | 97         | 68  | 28   | 27 |
| SR064-12-12    | 1-1/16x12 | 20        | 12   | 115        | 79  | 31.5 | 32 |
| SR064-16-16    | 1-5/16x12 | 25        | 16   | 132        | 90  | 32.5 | 41 |
| SR064-20-20    | 1-5/8x12  | 32        | 20   | 155        | 107 | 41   | 50 |
| SR064-24-24    | 1-7/8x12  | 40        | 24   | 175        | 118 | 45   | 60 |

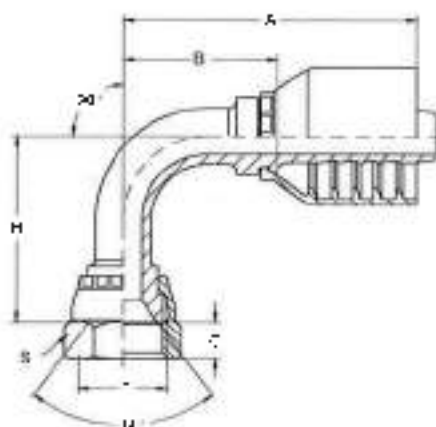

## SR055

90° JIC FEMALE 74° CONE SEAL  
SAE J514

| PART NO.    | THREAD T  | HOSE BORE |      | DIMENSIONS |     |      |    |
|-------------|-----------|-----------|------|------------|-----|------|----|
|             |           | DN        | DASH | A          | B   | H    | S  |
| SR055-04-04 | 7/16x20   | 5         | 04   | 53         | 30  | 34   | 14 |
| SR055-05-05 | 1/2x20    | 8         | 05   | 55         | 32  | 38   | 17 |
| SR055-06-06 | 9/16x18   | 10        | 06   | 64         | 38  | 43   | 19 |
| SR055-08-08 | 3/4x18    | 12        | 08   | 76         | 48  | 52   | 22 |
| SR055-10-10 | 7/8x14    | 16        | 10   | 85         | 54  | 56   | 27 |
| SR055-12-12 | 1-1/16x12 | 20        | 12   | 97         | 61  | 62.5 | 32 |
| SR055-16-16 | 1-5/16x12 | 25        | 16   | 115        | 76  | 72   | 41 |
| SR055-20-20 | 1-5/8x12  | 32        | 20   | 143        | 85  | 85   | 50 |
| SR055-24-24 | 1-7/8x12  | 40        | 24   | 165        | 109 | 100  | 60 |

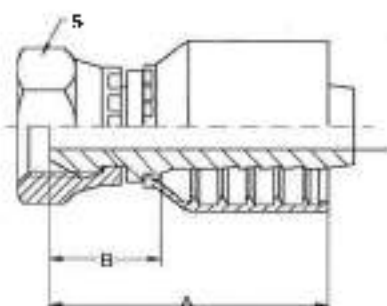


## SR006

ORFS FEMALE FLAT SEAT  
ISO 8434-3--SAE J1453

| PART NO.    | THREAD T   | HOSE BORE |      | DIMENSIONS |      |  |    |
|-------------|------------|-----------|------|------------|------|--|----|
|             |            | DN        | DASH | A          | B    |  | S  |
| SR006-04-04 | 9/16x18    | 6         | 04   | 50         | 27.5 |  | 17 |
| SR006-06-06 | 11/16x18   | 8         | 05   | 42         | 19.5 |  | 22 |
| SR006-06-06 | 11/16x16   | 10        | 06   | 54         | 28   |  | 22 |
| SR006-08-08 | 13/16x16   | 12        | 08   | 64         | 36   |  | 24 |
| SR006-10-10 | 1x14       | 16        | 10   | 72         | 41   |  | 30 |
| SR006-12-12 | 1-3/16x12  | 20        | 12   | 67         | 31   |  | 36 |
| SR006-16-16 | 1-7/16x12  | 25        | 16   | 67         | 24.5 |  | 41 |
| SR006-20-20 | 1-11/16x12 | 32        | 20   | 89         | 41.5 |  | 50 |
| SR006-24-24 | 2x12       | 40        | 24   | 96         | 39.5 |  | 60 |


SUNWAY

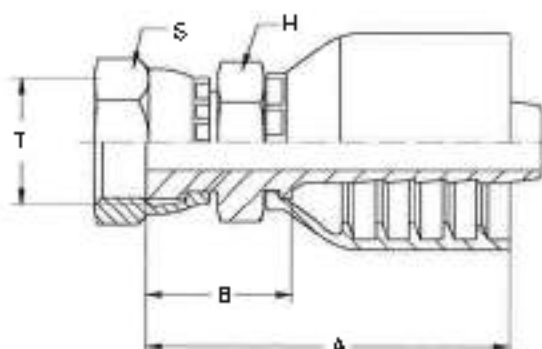

## SR006H

ORFS FEMALE FLAT SEAT  
ISO 8434-3--SAE J1453

| PART NO.     | THREAD T   | HOSE BORE |      |  | DIMENSIONS |      |    |    |
|--------------|------------|-----------|------|--|------------|------|----|----|
|              |            | DN        | DASH |  | A          | B    | H  | S  |
| SR005-04-04H | 9/16x18    | 6         | 04   |  | 44         | 21.5 | 14 | 17 |
| SR005-08-05H | 11/16x16   | 8         | 05   |  | 44         | 21.5 | 17 | 22 |
| SR005-08-06H | 11/16x16   | 10        | 06   |  | 50         | 22   | 17 | 22 |
| SR006-08-08H | 13/16x16   | 12        | 08   |  | 53         | 25   | 19 | 24 |
| SR006-10-10H | 1x14       | 16        | 10   |  | 60         | 29   | 24 | 30 |
| SR006-12-12H | 1-3/16x12  | 20        | 12   |  | 67         | 31.5 | 30 | 36 |
| SR006-15-16H | 1-7/16x12  | 25        | 15   |  | 75         | 33   | 36 | 41 |
| SR006-20-20H | 1-11/16x12 | 32        | 20   |  | 85         | 37   | 41 | 50 |
| SR006-24-24H | 2x12       | 40        | 24   |  | 94         | 37   | 50 | 60 |

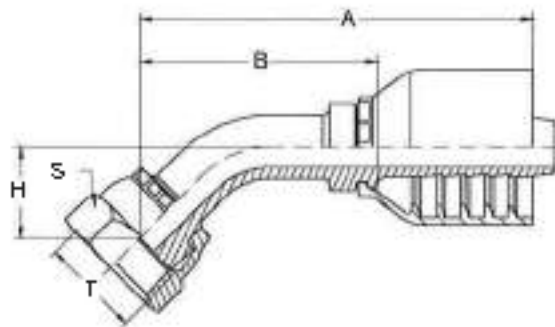


## SR666

45°ORFS FEMALE FLAT SEAT  
ISO 8434-3-·SAE J1453

| PART NO     | THREAD T   | HOSE BORE |      | DIMENSIONS |      |      |    |
|-------------|------------|-----------|------|------------|------|------|----|
|             |            | DN        | DASH | A          | B    | H    | S  |
| SR666-04-04 | 9/16x16    | 6         | 04   | 62         | 39.5 | 16   | 17 |
| SR666-06-06 | 11/16x16   | 8         | 06   | 67         | 44.5 | 17.5 | 22 |
| SR666-08-08 | 11/16x16   | 10        | 08   | 73         | 47   | 19   | 22 |
| SR666-08-08 | 13/16x16   | 12        | 08   | 87         | 59   | 21   | 24 |
| SR666-10-10 | 1x4        | 16        | 10   | 94         | 63   | 25   | 30 |
| SR666-12-12 | 1-3/16x12  | 20        | 12   | 113        | 77   | 28   | 36 |
| SR666-16-16 | 1-7/16x12  | 25        | 16   | 130        | 87.5 | 31   | 41 |
| SR666-20-20 | 1-11/16x12 | 32        | 20   | 149        | 101  | 35   | 50 |
| SR666-24-24 | 2x12       | 40        | 24   | 171        | 114  | 41   | 60 |


SUNWAY

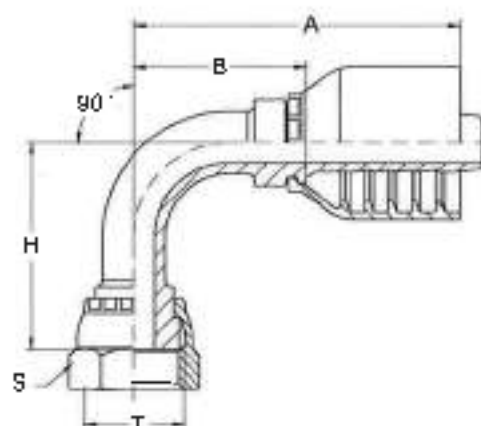

## SR056

90°ORFS FEMALE FLAT SEAT  
ISO 8434-3--SAE J1453

| PART NO.    | THREAD T   | HOSE BORE |      | DIMENSIONS |       |      |    |
|-------------|------------|-----------|------|------------|-------|------|----|
|             |            | DN        | DASH | A          | B     | H    | S  |
| SR056-04-04 | 9/16x18    | 6         | 04   | 52         | 29.5  | 28.5 | 17 |
| SR056-06-05 | 11/16x16   | 8         | 05   | 55         | 32.5  | 35   | 22 |
| SR056-06-06 | 11/16x16   | 10        | 06   | 62         | 37.5  | 38   | 22 |
| SR056-08-08 | 13/16x16   | 12        | 08   | 76         | 48    | 45   | 24 |
| SR056-10-10 | 1x14       | 16        | 10   | 85         | 54    | 50.5 | 30 |
| SR056-12-12 | 1-3/16x12  | 20        | 12   | 96         | 60    | 58   | 36 |
| SR056-10-16 | 1-7/16x12  | 25        | 16   | 119        | 76.5  | 69   | 41 |
| SR056-20-20 | 2-11/16x12 | 32        | 20   | 143        | 95    | 80   | 50 |
| SR056-24-24 | 2x12       | 40        | 24   | 166        | 109.5 | 93   | 60 |

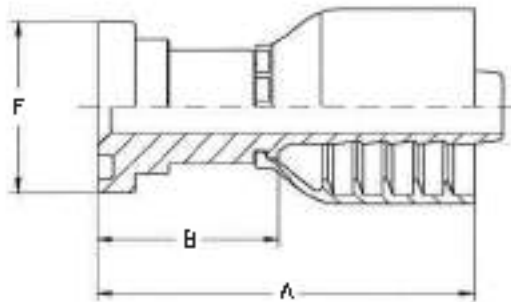


## SR023

SAE FLANGE 3000 PSI  
CONE61 SAEJ518

| PART NO.    | FLANGE SIZE | HOSE BORE |      | DIMENSIONS |    |    |  |
|-------------|-------------|-----------|------|------------|----|----|--|
|             |             | ON        | DASH | A          | B  | F  |  |
| SR023-08-08 | 1/2"        | 12        | 08   | 74         | 46 | 30 |  |
| SR023-12-12 | 3/4"        | 20        | 12   | 84         | 48 | 38 |  |
| SR023-16-16 | 1"          | 26        | 16   | 94         | 52 | 46 |  |
| SR023-20-20 | 1-1/4"      | 32        | 20   | 106        | 58 | 51 |  |
| SR023-24-24 | 1-1/2"      | 40        | 24   | 125        | 68 | 60 |  |
| SR023-32-32 | 2"          | 50        | 32   | 138        | 79 | 71 |  |

SUNWAY

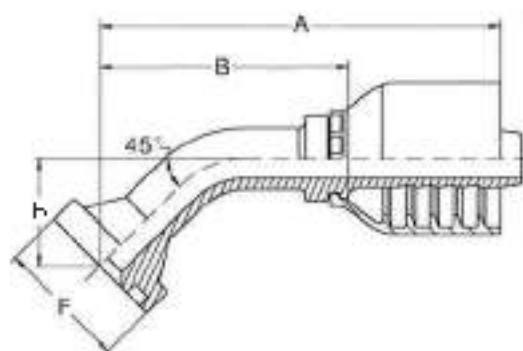


**SR068**

45°SAE FLANGE 3000 PSI  
CONE61 SAEJ518

| PART NO.    | FLANGE SIZE | HOSE BORE |      | DIMENSIONS |     |    |    |  |
|-------------|-------------|-----------|------|------------|-----|----|----|--|
|             |             | DN        | DASH | A          | B   | F  | H  |  |
| SR068-08-08 | 1/2"        | 12        | 08   | 90         | 62  | 30 | 24 |  |
| SR068-12-12 | 3/4"        | 20        | 12   | 114        | 78  | 38 | 30 |  |
| SR068-16-16 | 1"          | 26        | 16   | 130        | 88  | 45 | 30 |  |
| SR068-20-20 | 1-1/4"      | 32        | 20   | 150        | 102 | 51 | 35 |  |
| SR068-24-24 | 1-1/2"      | 40        | 24   | 172        | 115 | 60 | 40 |  |
| SR068-32-32 | 2"          | 50        | 32   | 205        | 146 | 71 | 43 |  |

SUNWAY

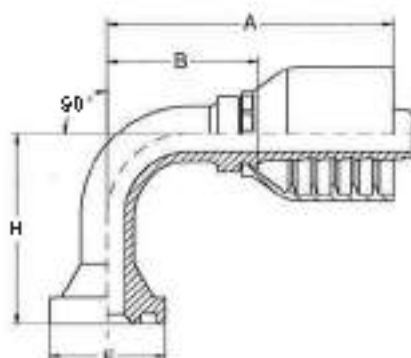


## SR059

90°SAE FLANGE 3000 PSI CONE61  
SAEJ518

| PART NO.    | FLANGE SIZE | HOSE BORE |      | DIMENSIONS |       |    |     |  |
|-------------|-------------|-----------|------|------------|-------|----|-----|--|
|             |             | DN        | DASH | A          | B     | F  | H   |  |
| SR059-08-08 | 1/2"        | 12        | 08   | 76         | 48    | 30 | 49  |  |
| SR059-12-12 | 3/4"        | 20        | 12   | 92         | 56    | 38 | 60  |  |
| SR059-16-16 | 1"          | 26        | 16   | 118        | 75.5  | 45 | 89  |  |
| SR059-20-20 | 1-1/4"      | 32        | 20   | 142        | 94.5  | 51 | 79  |  |
| SR059-24-24 | 1-1/2"      | 40        | 24   | 164        | 107.5 | 60 | 94  |  |
| SR059-32-32 | 2"          | 50        | 32   | 201        | 142   | 71 | 110 |  |


SUNWAY

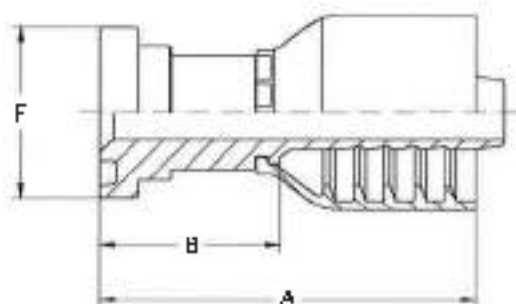

## SR024

SAE FLANGE 6000 PSI  
CONE62 SAEJ518

| PART NO.    | FLANGE SIZE | HOSE BORE |      | DIMENSIONS |      |    |  |
|-------------|-------------|-----------|------|------------|------|----|--|
|             |             | DN        | DASH | A          | B    | F  |  |
| SR024-08-08 | 1/2"        | 12        | 08   | 75         | 47   | 32 |  |
| SR024-12-12 | 3/4"        | 20        | 12   | 87         | 51.5 | 41 |  |
| SR024-16-16 | 1"          | 25        | 16   | 100        | 58   | 48 |  |
| SR024-20-20 | 1-1/4"      | 32        | 20   | 114        | 66   | 54 |  |
| SR024-24-24 | 1-1/2"      | 40        | 24   | 132        | 75   | 64 |  |
| SR024-32-32 | 2"          | 50        | 32   | 135        | 78   | 79 |  |

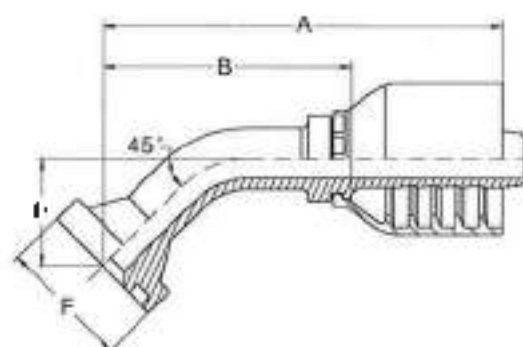


## SR069

45°SAE FLANGE 6000 PSI  
CONE62 SAEJ518

| PART NO.    | FLANGE SIZE | HOSE BORE |      | DIMENSIONS |       |    |    |  |
|-------------|-------------|-----------|------|------------|-------|----|----|--|
|             |             | DN        | DASH | A          | B     | F  | H  |  |
| SR069-08-08 | 1/2"        | 12        | 08   | 90         | 62    | 32 | 24 |  |
| SR069-12-12 | 3/4"        | 20        | 12   | 121        | 85    | 41 | 32 |  |
| SR069-16-16 | 1"          | 25        | 16   | 135        | 92.5  | 49 | 35 |  |
| SR069-20-20 | 1-1/4"      | 32        | 20   | 156        | 108.5 | 54 | 43 |  |
| SR069-24-24 | 1-1/2"      | 40        | 24   | 162        | 105.5 | 64 | 42 |  |
| SR069-32-32 | 2"          | 50        | 32   | 210        | 151   | 79 | 44 |  |

SUNWAY


## One-Piece Fitting

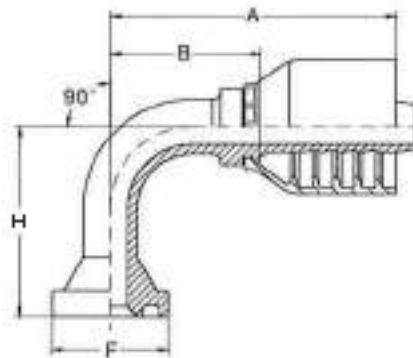

### SR058

90°SAE FLANGE 3000 PSI  
CONE62 SAEJ518

| PART NO.    | FLANGE SIZE | HOSE BORE |      | DIMENSIONS |     |    |     |  |
|-------------|-------------|-----------|------|------------|-----|----|-----|--|
|             |             | DN        | DASH | A          | B   | F  | H   |  |
| SR058-08-08 | 1/2"        | 12        | 08   | 76         | 48  | 32 | 49  |  |
| SR058-12-12 | 3/4"        | 20        | 12   | 98         | 62  | 41 | 63  |  |
| SR058-16-16 | 1"          | 25        | 16   | 121        | 76  | 48 | 75  |  |
| SR058-20-20 | 1-1/4"      | 32        | 20   | 144        | 95  | 54 | 90  |  |
| SR058-24-24 | 1-1/2"      | 40        | 24   | 170        | 108 | 64 | 98  |  |
| SR058-32-32 | 2"          | 50        | 32   | 208        | 143 | 79 | 132 |  |

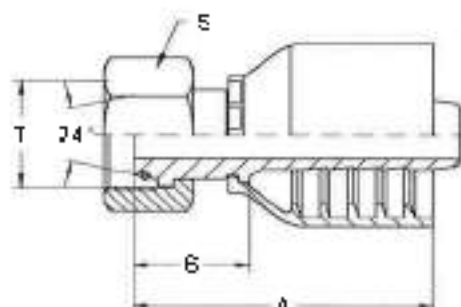


## SR803

METRIC FEMALE 24° CONE O-RING L.T.  
ISO 8434-1 - DIN 3865

| PART NO.     | THREAD T | HOSE BORE |      | TUBE O.D. | DIMENSIONS |      |    |  |  |
|--------------|----------|-----------|------|-----------|------------|------|----|--|--|
|              |          | DN        | DASH |           | A          | B    | S  |  |  |
| SR803-14-04  | M14X1.5  | 6         | 04   | 8         | 43         | 20.5 | 17 |  |  |
| SR803-14-04L | M14X1.5  | 6         | 04   | 8         | 46         | 25   | 17 |  |  |
| SR803-16-05  | M16X1.5  | 8         | 05   | 10        | 43         | 20   | 19 |  |  |
| SR803-16-05L | M16X1.5  | 8         | 05   | 10        | 48         | 25   | 19 |  |  |
| SR803-18-06  | M18X1.5  | 10        | 06   | 12        | 47         | 21   | 22 |  |  |
| SR803-18-06L | M18X1.5  | 10        | 06   | 12        | 53         | 27   | 22 |  |  |
| SR803-22-08  | M22X1.5  | 12        | 08   | 15        | 54         | 25.5 | 27 |  |  |
| SR803-22-08L | M22X1.5  | 12        | 08   | 15        | 59         | 30.5 | 27 |  |  |
| SR803-26-10  | M26X1.5  | 16        | 10   | 18        | 57         | 25.5 | 32 |  |  |
| SR803-26-10L | M26X1.5  | 16        | 10   | 18        | 63         | 32   | 32 |  |  |
| SR803-30-12  | M30X2    | 20        | 12   | 22        | 63         | 27.5 | 36 |  |  |
| SR803-30-12L | M30X2    | 20        | 12   | 22        | 71         | 35   | 36 |  |  |
| SR803-36-16  | M36X2    | 25        | 16   | 28        | 71         | 25   | 41 |  |  |
| SR803-36-16L | M36X2    | 25        | 16   | 28        | 79         | 35.5 | 41 |  |  |
| SR803-45-20  | M45X2    | 32        | 20   | 35        | 88         | 38   | 50 |  |  |
| SR803-52-24  | M52X2    | 40        | 24   | 42        | 102        | 45   | 60 |  |  |

SUNWAY

## One-Piece Fitting

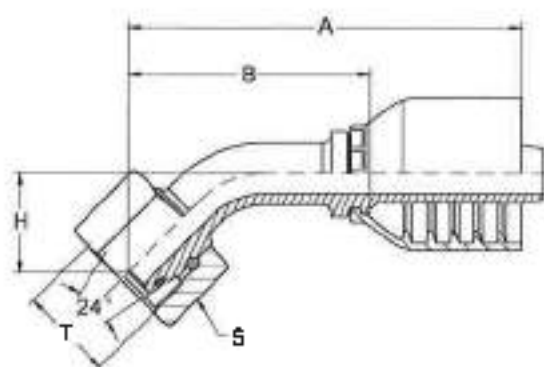


### SR863

45°METRIC FEMALE 24°CONE O-RING L.T.  
ISO 8434-1--DIN 3865

| PART NO.    | THREAD T | HOSE BORE |      | TUBE O.D. | DIMENSIONS |      |    |    |
|-------------|----------|-----------|------|-----------|------------|------|----|----|
|             |          | DN        | DASH |           | A          | B    | H  | S  |
| SR863-14-04 | M14X1.5  | 6         | 04   | 8         | 67         | 46   | 22 | 17 |
| SR863-16-05 | M16X1.5  | 8         | 05   | 10        | 71         | 48   | 22 | 19 |
| SR863-18-06 | M18X1.5  | 10        | 06   | 12        | 78         | 52   | 23 | 22 |
| SR863-22-08 | M22X1.5  | 12        | 08   | 15        | 94         | 61   | 28 | 27 |
| SR863-26-10 | M26X1.5  | 16        | 10   | 18        | 101        | 70   | 30 | 32 |
| SR863-30-12 | M30X1.5  | 20        | 12   | 15        | 119        | 83   | 35 | 36 |
| SR863-36-16 | M36X1.5  | 25        | 16   | 22        | 137        | 94.5 | 36 | 41 |
| SR863-45-20 | M45X2    | 32        | 20   | 35        | 155        | 108  | 40 | 50 |
| SR863-52-24 | M52X2    | 40        | 24   | 42        | 178        | 122  | 47 | 50 |


SUNWAY

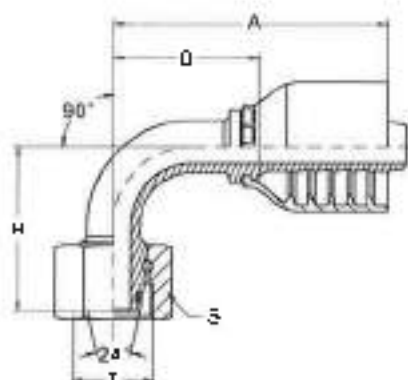

## SR853

90°METRIC FEMALE 24°CONO O-RING L.T.  
ISO 8434-1--DIN 3865


| PART NO.    | THREAD T | HOSE BORE |    | TUBE O.D. | DIMENSIONS |     |     |    |
|-------------|----------|-----------|----|-----------|------------|-----|-----|----|
|             |          | DN        | DN |           | A          | B   | H   | S  |
| SR853-14-04 | M14X1.5  | 6         | 04 | 8         | 55         | 32  | 36  | 17 |
| SR853-16-05 | M16X1.5  | 8         | 05 | 10        | 55         | 32  | 41  | 19 |
| SR853-18-06 | M18X1.5  | 10        | 06 | 12        | 64         | 38  | 44  | 22 |
| SR853-22-08 | M22X1.5  | 12        | 08 | 16        | 77         | 49  | 53  | 27 |
| SR853-26-10 | M26X1.5  | 16        | 10 | 18        | 85         | 54  | 58  | 32 |
| SR853-30-12 | M30X2    | 20        | 12 | 22        | 98         | 62  | 67  | 36 |
| SR853-36-16 | M36X2    | 26        | 16 | 28        | 110        | 77  | 77  | 41 |
| SR853-45-20 | M45X2    | 32        | 20 | 35        | 143        | 96  | 85  | 50 |
| SR853-52-24 | M52X2    | 40        | 24 | 42        | 167        | 110 | 105 | 60 |

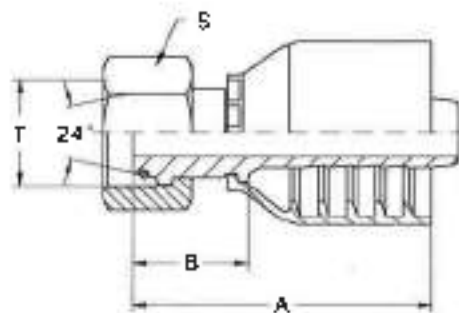

## SR804

METRIC FEMALE 24° CONE O-RING H.T.  
ISO 8434-1--DIN 3865

| PART NO.     | THREAD T | HOSE BORE |      | TUBE O.D. | DIMENSIONS |      |    |  |  |
|--------------|----------|-----------|------|-----------|------------|------|----|--|--|
|              |          | ON        | DASH |           | A          | B    | S  |  |  |
| SR804-16-04  | M16x1.5  | 6         | 04   | 8         | 44         | 23   | 19 |  |  |
| SR804-16-04L | M16x1.5  | 6         | 04   | 8         | 49         | 26.5 | 19 |  |  |
| SR804-18-05  | M18x1.5  | 8         | 05   | 10        | 43         | 20   | 22 |  |  |
| SR804-18-05L | M18x1.5  | 8         | 05   | 10        | 49         | 26   | 22 |  |  |
| SR804-20-06  | M20x1.5  | 10        | 06   | 12        | 49         | 23.5 | 24 |  |  |
| SR804-20-06L | M20x1.5  | 10        | 06   | 12        | 55         | 29   | 24 |  |  |
| SR804-24-08  | M24x1.5  | 12        | 08   | 16        | 55         | 27.5 | 30 |  |  |
| SR804-24-08L | M24x1.5  | 12        | 08   | 16        | 63         | 34.5 | 30 |  |  |
| SR804-30-10  | M30x2    | 16        | 10   | 20        | 60         | 29   | 36 |  |  |
| SR804-30-10L | M30x2    | 16        | 10   | 20        | 67         | 36   | 36 |  |  |
| SR804-36-12  | M36x2    | 20        | 12   | 25        | 65         | 29   | 46 |  |  |
| SR804-36-12L | M36x2    | 20        | 12   | 25        | 72         | 36   | 46 |  |  |
| SR804-42-16  | M42x2    | 25        | 16   | 30        | 71         | 29   | 50 |  |  |
| SR804-42-16L | M42x2    | 25        | 16   | 30        | 80         | 38   | 50 |  |  |
| SR804-52-20  | M52x2    | 32        | 20   | 38        | 83         | 35.5 | 60 |  |  |
| SR804-52-20L | M52x2    | 32        | 20   | 38        | 94         | 46   | 60 |  |  |

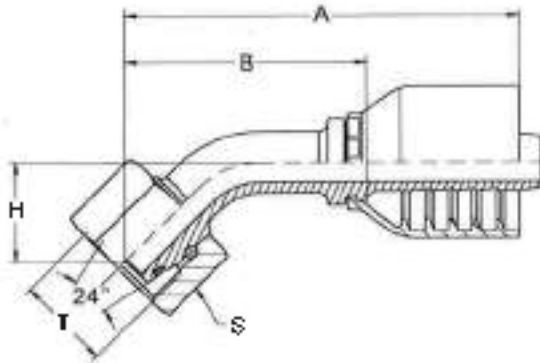


## SR864

45°METRIC FEMALE 24°CONE O-RING H.T.  
ISO 8434-1--DIN 3865

| PART NO.    | THREAD T | HOSE BORE |      | TUBE O.D. | DIMENSIONS |      |    |    |
|-------------|----------|-----------|------|-----------|------------|------|----|----|
|             |          | DN        | DASH |           | A          | B    | H  | S  |
| SR864-16-04 | M16x1.5  | 6         | 04   | 8         | 70         | 45.5 | 22 | 19 |
| SR864-18-05 | M18x1.5  | 8         | 05   | 10        | 70         | 47   | 22 | 22 |
| SR864-20-06 | M20x1.5  | 10        | 06   | 12        | 75         | 47   | 24 | 24 |
| SR864-24-08 | M24x1.5  | 12        | 08   | 16        | 95         | 67   | 29 | 30 |
| SR864-30-10 | M30x2    | 16        | 10   | 20        | 100        | 69   | 32 | 36 |
| SR864-36-12 | M36x2    | 20        | 12   | 25        | 116        | 82   | 36 | 46 |
| SR864-42-16 | M42x2    | 25        | 16   | 30        | 134        | 91.5 | 34 | 50 |
| SR864-52-20 | M52x2    | 32        | 20   | 38        | 159        | 111  | 44 | 60 |

SUNWAY

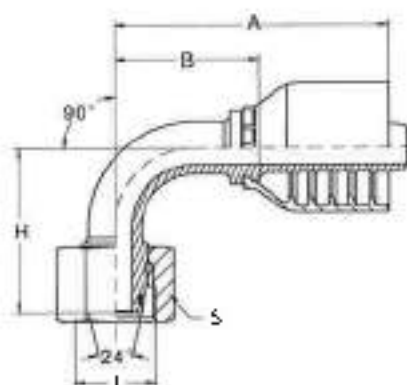

## SR854

90°METRIC FEMALE 24°CONE O-RING H.T.  
ISO 8434-1--DIN 3865

| PART NO.    | THREAD I | HOSE BORE |      | TUBE O D | DIMENSIONS |    |      |    |
|-------------|----------|-----------|------|----------|------------|----|------|----|
|             |          | DN        | DASH |          | A          | B  | H    | S  |
| SR854-16-04 | M16x1.5  | 6         | 04   | 8        | 53         | 30 | 36.5 | 19 |
| SR854-18-05 | M18x1.5  | 8         | 05   | 10       | 55         | 32 | 41   | 22 |
| SR854-20-06 | M20x1.5  | 10        | 06   | 12       | 67         | 38 | 45.5 | 24 |
| SR854-24-08 | M24x1.5  | 12        | 08   | 16       | 76         | 48 | 55   | 30 |
| SR854-30-10 | M30x2    | 16        | 10   | 20       | 84         | 53 | 61.5 | 36 |
| SR854-36-12 | M36x2    | 20        | 12   | 25       | 97         | 61 | 65.5 | 46 |
| SR854-42-16 | M42x2    | 25        | 16   | 30       | 118        | 76 | 74.5 | 50 |
| SR854-52-20 | M52x2    | 32        | 20   | 38       | 144        | 96 | 91   | 60 |

SUNWAY