


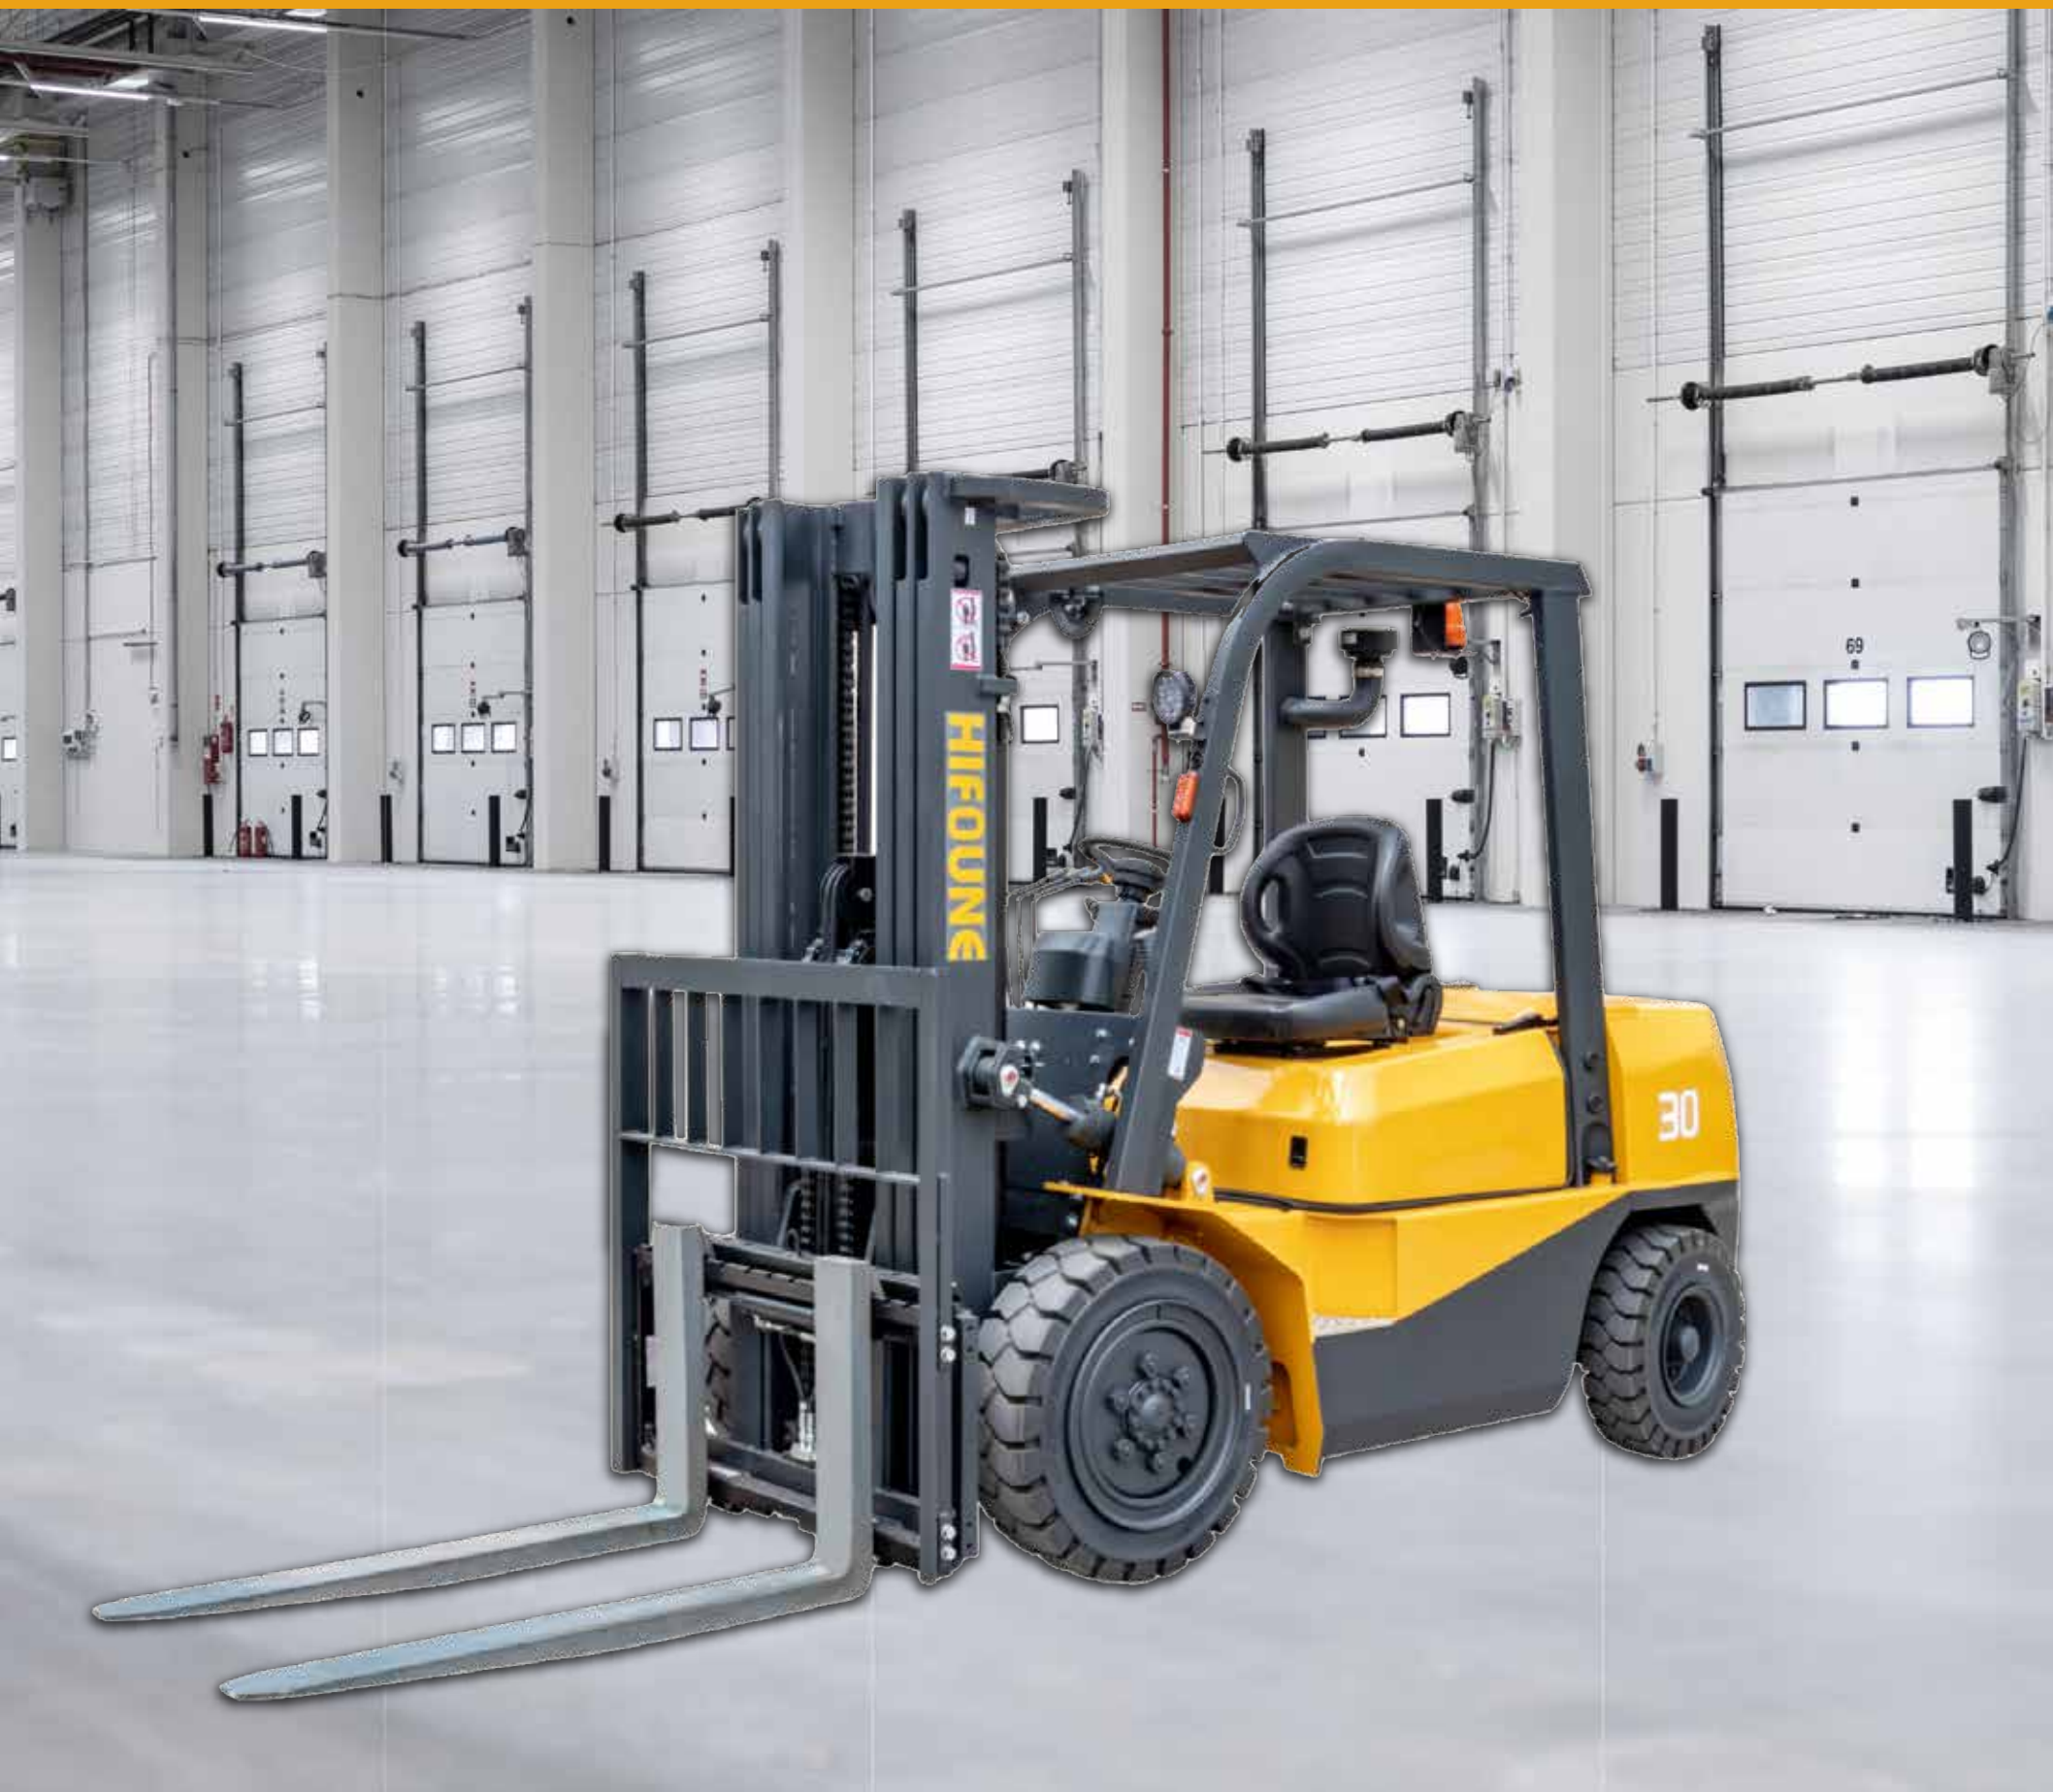

A SERIES COMBUSTION FORKLIFT

FD 30T

Specification

| Model          |         |                              | FD30T                  |
|----------------|---------|------------------------------|------------------------|
| Specifications | -       | Power Unit                   | Diesel                 |
|                | -       | Operator Type                | Driver/Seat            |
|                | -       | Transmission Box Type        | Automatic Transmission |
|                | kg      | Rated Capacity               | 3000                   |
|                | mm      | Load Center                  | 500                    |
|                | mm      | Max Lifting Height           | 3000                   |
|                | -       | Tire Type                    | Pneumatic Tire         |
|                | -       | Front Tire Number            | 2                      |
|                | -       | Rear Tire Number             | 2                      |
|                | -       | Front Tire Size              | 28x9-15-14PR           |
| Performance    | -       | Rear Tire Size               | 6.5-10-10PR            |
|                | mm/s    | Lifting Speed (Loaded)       | 480                    |
|                | mm/s    | Lifting Speed (Unloaded)     | 500                    |
|                | mm/s    | Lowering Speed (Loaded)      | 420                    |
|                | mm/s    | Lowering Speed (Unloaded)    | 400                    |
|                | km/h    | Travelling Speed (Loaded)    | 20                     |
|                | km/h    | Travelling Speed (Unloaded)  | 21                     |
|                | %       | Max Grade-ability (Loaded)   | 20                     |
|                | kN      | Max Drawbar Pull (Loaded)    | 17                     |
|                | deg     | Mast Tilting Angle (Fwd/Bwd) | 6/12                   |
| Dimensions     | mm      | Free Lifting Height          | 150                    |
|                | mm      | Turning Radius               | 2395                   |
|                | mm      | Overall Length (with fork)   | 3800                   |
|                | mm      | Overall Width                | 1240                   |
|                | mm      | Overhead Guard Height        | 2145                   |
|                | mm      | Fork Size (LxWxT)            | 1220x125x45            |
|                | mm      | Mast Height (Fork Lowered)   | 2140                   |
|                | V/Ah    | Battery (Voltage/Capacity)   | 12/90                  |
|                | kg      | Truck Weight                 | 4250                   |
|                | L       | Fuel Tank Capacity           | 70                     |
| Engine         | -       | Brand                        | XINCHAI                |
|                | -       | Model                        | C490                   |
|                | kw/rpm  | Rated Power                  | 40/2650                |
|                | n-m/rpm | Rated Torque                 | 160/1600-2000          |
|                | -       | Number of Cylinder           | 4                      |
|                | -       | Displacement                 | 2.67                   |

The standard model data would vary according to the configuration.

HIFOUNE

SDN. BHD.

 +60 11-5957 4199

For sales, support, parts or enquiries

